



PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

9122C SQUARE GIMBAL ADJUSTABLE TRIMLESS ACCENT - The VF100 Series of recessed downlight and housing configurations represent the pinnacle of innovation for the architectural industry. These fixtures meet and exceed the needs of today's lighting designers and specifiers for small recessed fixtures that perform.


Measurements in () are metric equivalents.

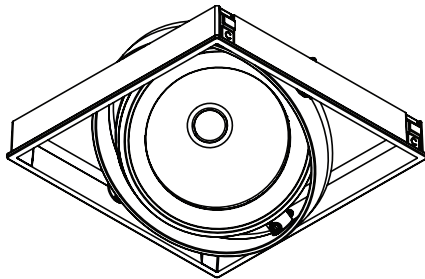

- 90° incremental horizontal rotation
- 45° x 45° Locking vertical tilt aiming




Safety cable



5.00" Sq
(127)

REPLACES GIMBALO

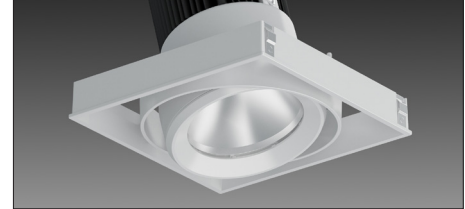

Specifications

SQUARE DOWNLIGHT

- Recessed gimbal adjustable downlight
- 5.00" square aluminum trimless insert
- Double gimbal assembly
- Accepts up to 2 or more optical accessories
- Snap in trimless insert
- Safety cable included
- Powder coat finish

TRIM ORDERING INFO

TRIM SERIES	BRIDGELUX WATTAGE	CRI / COLOR	CREE WATTAGE	CRI / COLOR	BEAM	TRIM FINISH
9122C	17L	8027	20C	8027	N Narrow M Medium W Wide	MB Black MW White XX Custom
	22L	8030	28C	8030		
		8035		8035		
		8040		8040		
		9027		9527		
		9030		9530		
		9727		9535		
		9730		9540		

or

Example: **9122C-20C-9535-N-MW**

LED Performance Options

5 YEAR WARRANTY
Limited



BRIDGELUX

WATTAGE / LUMENS	CRI / COLOR	BEAM
17L 17W LED / 1700lm nom.	8027 80CRI / 2700K	N
22L 22W LED / 2200lm nom.	8030 80CRI / 3000K	Narrow 22°
	8035 80CRI / 3500K	M
	8040 80CRI / 4000K	Medium 43°
	9027 90CRI / 2700K	W
	9030 90CRI / 3000K	Wide 58°
	9727 97CRI / 2700K	
	9730 97CRI / 3000K	




CREE

WATTAGE / LUMENS	CRI / COLOR	BEAM
20C 20W LED / 1800lm nom.	8027 80CRI / 2700K	N
28C 28W LED / 2200lm nom.	8030 80CRI / 3000K	Narrow 14°
	8035 80CRI / 3500K	M
	8040 80CRI / 4000K	Medium 30°
	9527 95CRI / 2700K	W
	9530 95CRI / 3000K	Wide 40°
	9535 95CRI / 3500K	
	9540 95CRI / 4000K	



Measurements in () are metric equivalents.

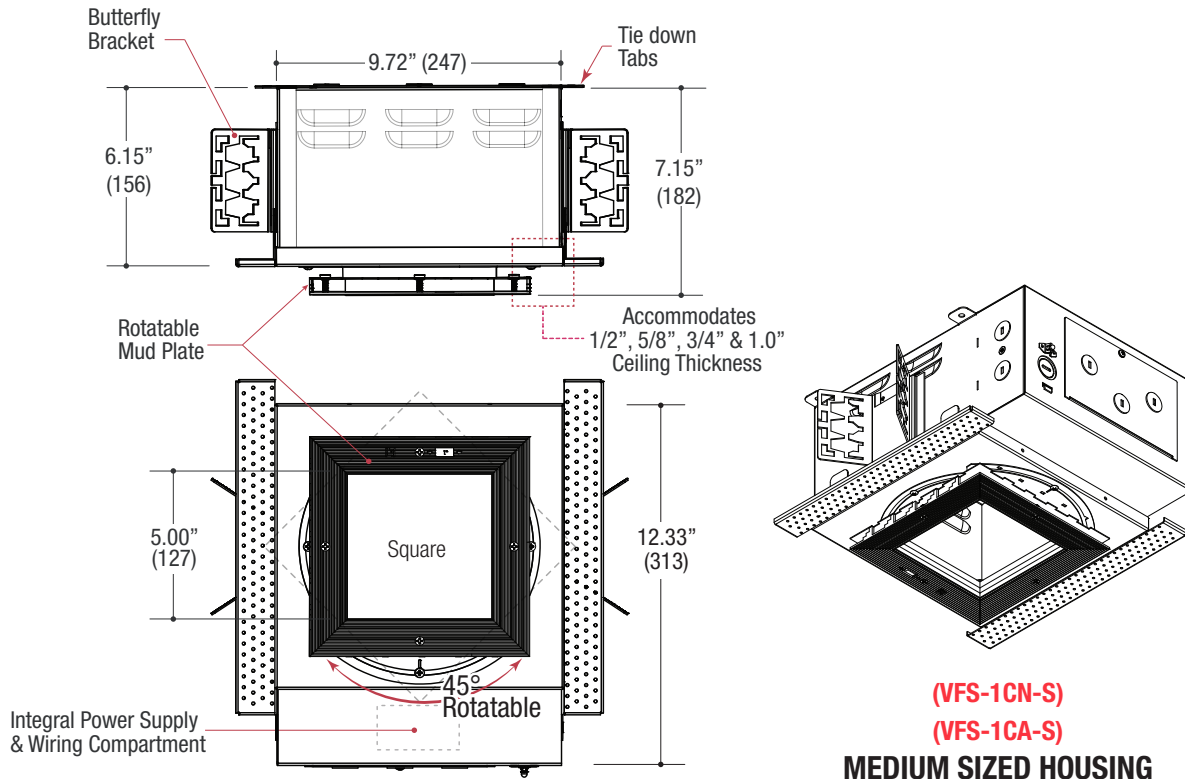

(VFS-1CN-S)
(VFS-1CA-S)
MEDIUM SIZED HOUSING

Specifications

SQUARE TRIMLESS HOUSING

- Housing of all steel construction
- Adjustable plaster frame
- Black powder coat finish
- **Ceiling Cut-out - 7.65" X 7.65"**

ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Internal thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Optional dimming

MOUNTING

- Butterfly brackets for commercial installation in drywall or other mud-in ceiling types
- Perforated plate adjusts for 1/2", 5/8", 3/4" & 1.0" ceiling thickness
- Includes Heavy-Duty **L-Bars™** hanger bar system for residential installation

LABELS

- Suitable for damp location
- **Air-Tight / IC Optional**

5 YEAR WARRANTY
Limited










IC / Air-Tight

HOUSING ORDERING INFO

SERIES	BRIDGELUX	CREE	DRIVER	VOLTAGE	FINISH	OPTIONS
VFS-1CN-S Medium Square Trimless Insert New Construction Housing	17L 17W LED	20C 20W LED	D1 Phase Dimming (120V only) D2 0-10V Dimming (120-277V only) D3 Lutron Hi-lume™* Forward Phase 2 wire 1% (120V only) D4 Lutron Hi-lume™* EcoSystem™ & 3 wire (1%) (120-277V only) DE Lutron Hi-lume™ EcoSystem™* 1% w/Soft-On, Fade-to-Black™ (120-277V only) <small>*Consult factory for further dimming options</small>	1 120V U 120-277V	Leave Blank for Black WW White	EM Remotely Mounted Emergency LED Inverter IC* Insulated Ceiling (VFS-1CA-S only)
	22L 22W LED	28C 28W LED				
VFS-1CA-S* Medium Square Trimless Insert Air-Tight Housing Black finish is standard						
or						

Ordering Example: **VFS-1CN-S-20C-D1-1-WW-EM**

OPTICAL ACCESSORY	DESCRIPTION	LIGHT SOURCE
		MEDIUM
		<ul style="list-style-type: none"> • PAR20 • PAR20CMH • T4GU6.5 • 70mm LED
	Clear Lens	OPTC-CLR
	UV Lens	OPTC-UVL
	Hex Cell Louver	OPTC-HXL
	Diffusion Lens	OPTC-DFL
	Diffusion Lens - LED Film	OPTC-L-DFL
	Linear Spread Lens	OPTBC-LSL
	Linear Spread Lens - LED Film	OPTC-L-LSL
	Prismatic Spread Lens	OPTC-PSL
	Snoot - Black	OPTC-SNB
	Snoot - White	OPTC-SNW
	Snoot - Silver	OPTC-SNS
	Snoot - White With Black Splay	OPTC-SNWB
	Snoot - Silver With Black Splay	OPTC-SNSB

* Other filters, colored glass, dichroics & micro-lenses available upon request