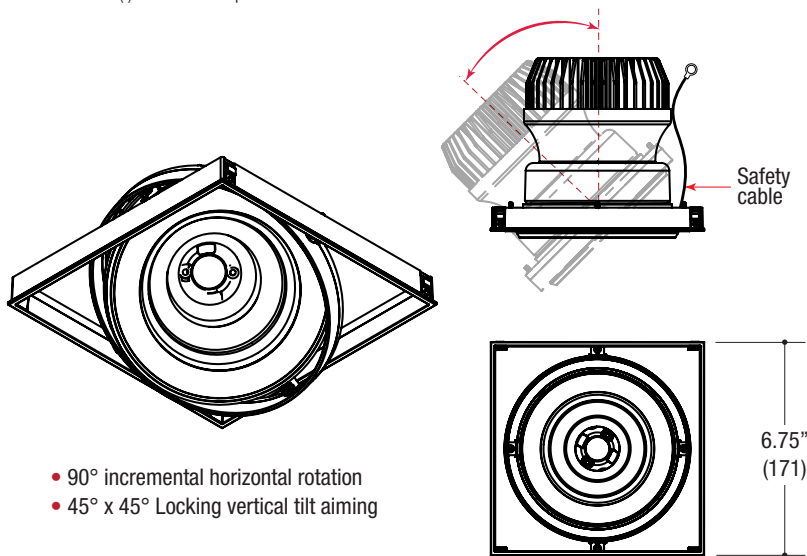


**TRIMLESS LED LARGE**

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

**9122D** SQUARE GIMBAL ADJUSTABLE TRIMLESS ACCENT - VF100 Series recessed downlight and housing configurations represent the pinnacle of innovation and design for the architectural industry. These fixtures meet and exceed the needs of today's lighting designers and specifiers for small recessed fixtures that perform.

Measurements in ( ) are metric equivalents.



- 90° incremental horizontal rotation
- 45° x 45° Locking vertical tilt aiming

**REPLACES GIMBALO**



### Specifications

#### SQUARE DOWNLIGHT

- Recessed gimbal adjustable downlight
- 6.75" square die-cast aluminum trimless insert
- Double gimbal assembly
- Accepts up to 2 or more optical accessories
- Snap in spring retainers for easy trim insertion and removal
- Safety cable included
- Powder coat finish

### TRIM ORDERING INFO

TRIM SERIES	BRIDGELUX WATTAGE	CRI / COLOR	CREE WATTAGE	CRI / COLOR	BEAM	TRIM FINISH
<b>9122D</b> New Construction Housing	22L 34L	8027 8030 8035 8040	35C 41C	8027 8030 8035 8040	<b>N</b> Narrow <b>M</b> Medium <b>W</b> Wide	<b>MB</b> Black <b>MW</b> White <b>XX</b> Custom
<b>6.75" SQUARE</b> Trimless Insert Adjustable Downlight		9027 9030 9727 9730		9527 9530 9535 9540		
			or			

Example: **9122D-35C-9527-N-MW**

## LED Performance Chart

**5 YEAR WARRANTY**  
Limited



### BRIDGELUX

WATTAGE / LUMENS	CRI / COLOR	BEAM
<b>22L</b> 22W LED / 2200lm nom.	<b>8027</b> 80CRI / 2700K	<b>N</b>
<b>34L</b> 34W LED / 2800lm nom.	<b>8030</b> 80CRI / 3000K	<b>Narrow</b> 17°
	<b>8035</b> 80CRI / 3500K	<b>M</b>
	<b>8040</b> 80CRI / 4000K	<b>Medium</b> 26°
	<b>9027</b> 90CRI / 2700K	<b>W</b>
	<b>9030</b> 90CRI / 3000K	<b>Wide</b> 52°
	<b>9727</b> 97CRI / 2700K	
	<b>9730</b> 97CRI / 3000K	

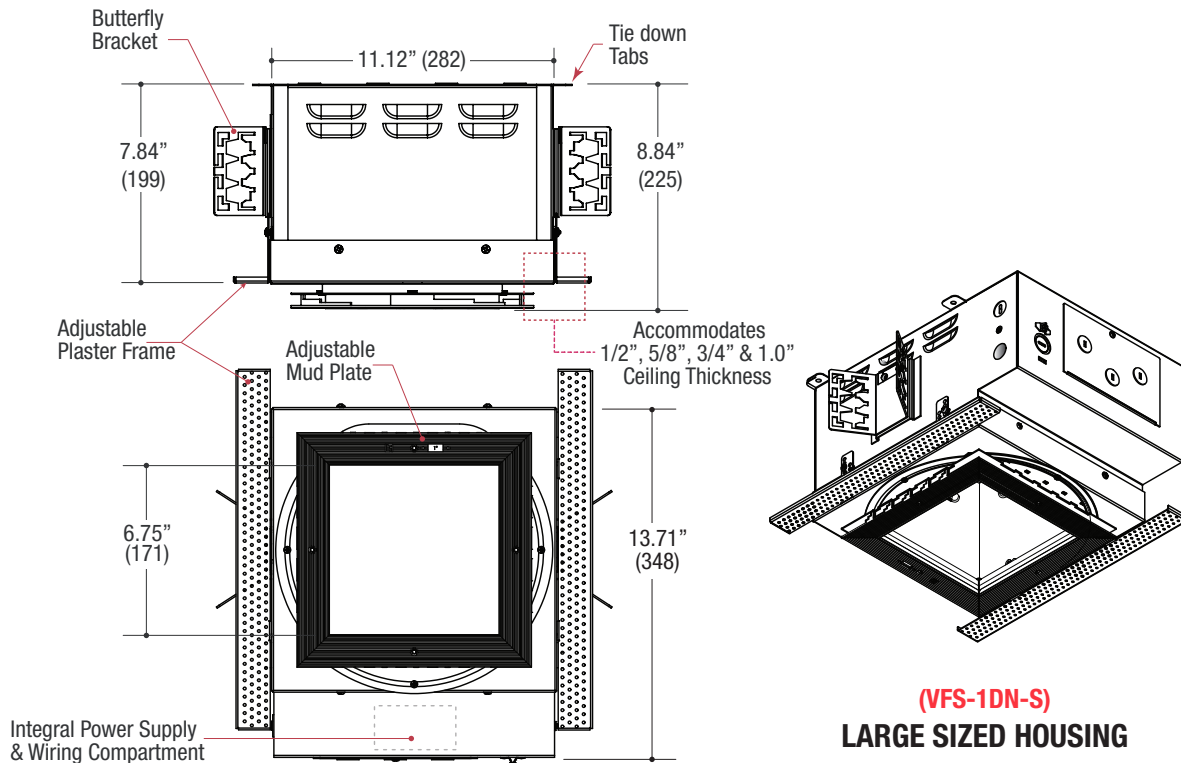


### CREE

WATTAGE / LUMENS	CRI / COLOR	BEAM
<b>35C</b> 35W LED / 2970lm nom.	<b>8027</b> 80CRI / 2700K	<b>N</b>
<b>41C</b> 41W LED / 3350lm nom.	<b>8030</b> 80CRI / 3000K	<b>Narrow</b> 13°
	<b>8035</b> 80CRI / 3500K	<b>M</b>
	<b>8040</b> 80CRI / 4000K	<b>Medium</b> 20°
	<b>9527</b> 95CRI / 2700K	<b>W</b>
	<b>9530</b> 95CRI / 3000K	<b>Wide</b> 44°
	<b>9535</b> 95CRI / 3500K	
	<b>9540</b> 95CRI / 4000K	



Measurements in ( ) are metric equivalents.



## Specifications

### SQUARE TRIMLESS HOUSING

- Housing of all steel construction
- Adjustable plaster frame
- Black powder coat finish
- **Ceiling Cut-out - 9.42" X 9.42"**

### ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Internal thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Optional dimming

### MOUNTING

- Butterfly brackets for commercial installation in drywall, or other mud in ceiling types
- Perforated plate adjusts for 1/2", 5/8", 3/4" & 1.0" ceiling thickness
- Includes Heavy-Duty **L-Bars™** hanger bar system for residential installation

### LABELS

- Suitable for damp location
- **Air-Tight / IC Optional**

### HOUSING ORDERING INFO








**5 YEAR WARRANTY**  
Limited



**IC / Air-Tight**

SERIES	BRIDGELUX	CREE	DRIVER	VOLTAGE	FINISH	OPTIONS
<b>VFS-1DN-S</b> Large Square Trimless Insert New Construction Housing	22L 22W LED	35C 20W LED	<b>D1</b> Phase Dimming (120V only) <b>D2</b> 0-10V Dimming (120-277V only) <b>D3</b> Lutron Hi-lume™* Forward Phase 2 wire 1% (120V only) <b>D4</b> Lutron Hi-lume™* EcoSystem™ & 3 wire (1%) (120-277V only) <b>DE</b> Lutron Hi-lume™ EcoSystem™* 1% w/Soft-On, Fade-to-Black™ (120-277V only) <small>*Consult factory for further dimming options</small>	<b>1</b> 120V <b>U</b> 120-277V	<b>Leave Blank for Black</b>  <b>WW</b> White	<b>EM</b> Remotely Mounted Emergency LED Inverter  <b>IC*</b> Insulated Ceiling (VFS-1DA-S only)
	34L 34W LED	41C 41W LED				
<b>VFS-1DA-S*</b> Large Square Trimless Insert Air-Tight Housing  Black finish is standard						
<b>or</b>						

Ordering Example: **VFS-1DA-S-35C-D1-1-WW-IC**

OPTICAL ACCESSORY	DESCRIPTION	LIGHT SOURCE
		LARGE
		<ul style="list-style-type: none"> <li>• PAR30 / PAR30CMH</li> <li>• T4G8.5</li> <li>• T6G12</li> <li>• AR111 / CDMR111</li> <li>• 111mm LED</li> </ul>
	Clear Lens	OPTD-CLR
	Clear Lens - LED Film	OPTD-L-CLR
	UV Lens	OPTD-UVL
	Hex Cell Louver	OPTD-HXL
	Diffusion Lens	OPTD-DFL
	Diffusion Lens - LED Film	OPTD-L-DFL
	Linear Spread Lens	OPTBD-LSL
	Linear Spread Lens - LED Film	OPTD-L-LSL
	Prismatic Spread Lens	OPTD-PSL
	Snoot - Black	OPTD-SNB
	Snoot - White	OPTD-SNW
	Snoot - Silver	OPTD-SNS
	Snoot - White With Black Splay	OPTD-SNWB
	Snoot - Silver With Black Splay	OPTD-SNSB

\* Other filters, colored glass, dichroics & micro-lenses available upon request