



**SURFACE / SUSPENDED**

**LED**

**MINI**

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in ( ) are metric equivalents.

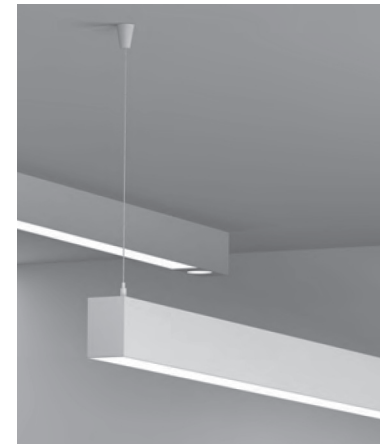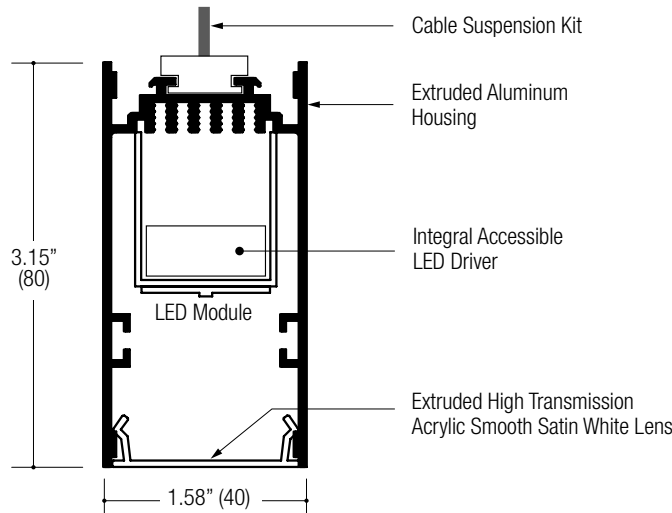

**EF300 Series  
SURFACE & SUSPENDED**

**Perfect Fit® technology** Engineered to provide seamless lighting in any length, the fixture can be ordered to the nearest inch. Contractor cuttable design insures perfect installations with minimal coordination by allowing the electrician to trim up to six inches from the length of fixture during installation.

### CONSTRUCTION

- 1.58" (40) wide x 3.15" (80) tall extruded aluminum housing
- Die-cast aluminum end caps with concealed fasteners
- Locking joiners allow units to be connected for long straight runs
- Powder coat finish

### LED Source

- Available at three power levels up to 1200 lumens per foot
- Tight binning ensures color consistency within 2 MacAdam ellipses
- Dense pitch for uniform output

### OPTICS

- Smooth satin white extruded acrylic lens

### ELECTRICAL

- Field-replaceable integral LED driver
- Integral wiring compartment
- Integral thermal protection
- Easy maintenance access via lens assembly
- Quick disconnect through wiring for continuous runs

### MOUNTING

- Surface mount
- Suspended cable mount
- Rigid pendant stem mount

### LABELS

- Suitable for damp location

### COMPONENTS

- See pages 2 and 3 for EF300 components (ie, L's, T's, End Caps, Mountings, etc.)

**5 YEAR  
WARRANTY**  
Limited




### ORDERING INFO

SERIES	WATTAGE / FT	CRI / COLOR	LENS	DRIVER	LENGTH	VOLTS	FINISH	MOUNTING	CONFIG.
<b>EF3-A-M</b>  EF300 Mini LED -Wall Mount -Surface Mount -Suspended Moun	<b>04F</b> 04W LED 440 lm / ft nom.	<b>80CRI</b>	<b>LN</b> Satin white lens	<b>D2</b> 0-10V Dim. Driver (120-277V only)	<b>024</b> 24" 2ft	<b>1</b> 120V	<b>BB</b> Black	<b>SM</b> Surface Mount	<b>COM</b> End Caps
		<b>8027</b> - 2700K <b>8030</b> - 3000K		<b>D3</b> Lutron Hi-lume™ Forward Phase 2 wire 1% (120V only)	<b>036</b> 36" 3ft <b>048</b> 48" 4ft <b>096</b> 96" 8ft				
	<b>08F</b> 08W LED 800 lm / ft nom.	<b>8035</b> - 3500K <b>8040</b> - 4000K	<b>CV*</b> Aluminum cover	<b>D4</b> Lutron Hi-lume™ 3 wire 1% (120-277V only)	<b>U</b> 120-277V	<b>0</b> None	<b>WW</b> White <b>XX</b> Custom	<b>SP</b> Suspension Mount (Includes SUSP kit & SUPL kit)	<b>EXT</b> No End Caps
		<b>90CRI</b> <b>9027</b> - 2700K <b>9030</b> - 3000K <b>9035</b> - 3500K		<b>E4</b> Dimmable Lutron Hi-lume™ 1% EcoSystem™ LED driver (120-277V only)					
<b>12F</b> 12W LED 1200 lm / ft nom.	<b>000*</b> None - cover required	<b>0000*</b> - None Cover required  Consult factory for other CRI / Color options	<b>NA</b> None	<b>E4</b> Dimmable Lutron Hi-lume™ 1% EcoSystem™ LED driver (120-277V only)			<b>ST</b> Stem Mount (Includes STEM kit)	<b>WM</b> Wall Mount Bracket	



Ordering Example: **EF3-A-M-04F-8027-LN-D2-024-1-BB-SP-COM**

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------



Measurements in ( ) are metric equivalents.

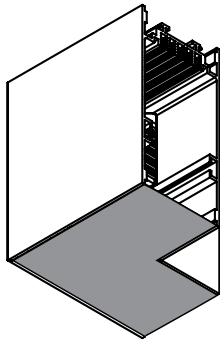


**ELL**  
90° Elbow  
Horizontal

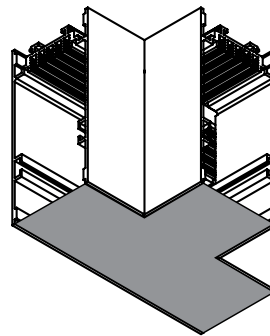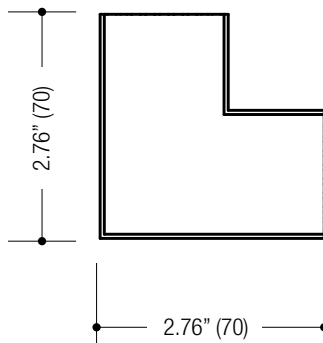

**TEE**  
90° 3-Way  
Connection

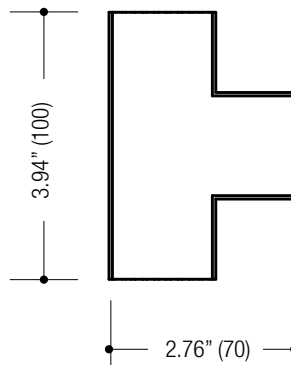

**4WY**  
90° 4-Way  
Connection

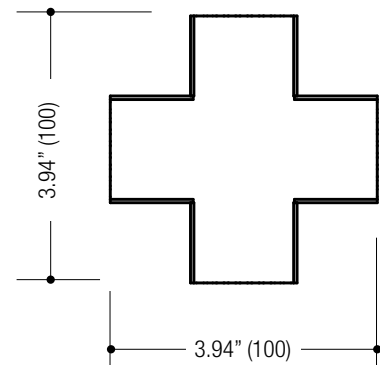

***FOR LIT CORNER OPTIONS CONSULT FACTORY***

**5 YEAR  
WARRANTY**  
Limited




**ORDERING INFO**

SERIES	WATTAGE / FT	CRI / COLOR	LENS	DRIVER	TYPE	VOLTAGE	FINISH
<b>EF3-A-M</b>	<b>000*</b> None - Cover Required	<b>0000*</b> None - Cover Required	<b>CV*</b> Aluminum Cover	<b>NA</b> None	<b>ELL</b> (Unlit) 90° Elbow Horizontal <b>TEE</b> (Unlit) "T" 3-WAY <b>4WY</b> (Unlit) "X" 4-WAY	<b>0</b> None	<b>BB</b> Black <b>WW</b> White <b>XX</b> Custom
<b>EF300</b> Mini LED -Wall Mount -Surface Mount -Suspended Mount							
<b>EF3-A-M</b>							


Ordering Example: **EF3-A-M-000-0000-CV-NA-ELL-0-BB**

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

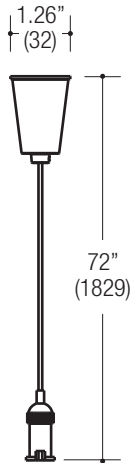


### SUSP Suspension Kit

- Surface mount canopy
- Standard surface mounting hardware
- Aircraft Cable 6' overall length
- Fixture mounting hardware
- Silver only

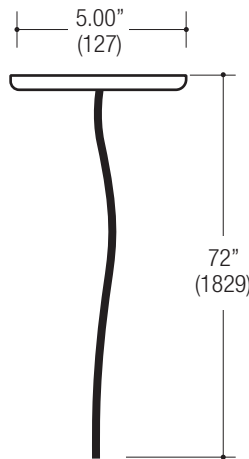

### SUPL Power Supply Kit

- Surface mount canopy
- Standard J-box surface mounting hardware
- Black power supply line 6' overall length
- Connecting hardware
- Use with suspension kit to supply power

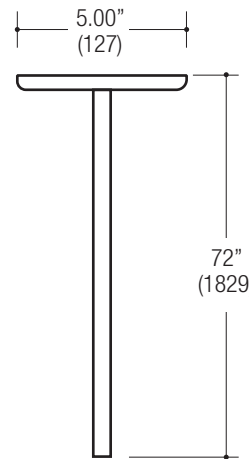

### STEM Stem Kit

- Surface mount canopy
- Standard surface mounting hardware
- Extruded aluminum stem 6' overall length
- Fixture mounting hardware
- Includes power supply within stem

#### ORDERING INFO



SERIES	LENGTH	FINISH
<b>EF3-SUSP</b> SUSPENSION KIT	<b>072</b> 72" - 6' ft	<b>SS</b> Silver (EF3-SUSP only)
<b>EF3-SUPL</b> POWER SUPPLY KIT		<b>BB</b> Black <b>WW</b> White <b>XX</b> Custom
<b>EF3-STEM</b> STEM KIT		



Measurements in ( ) are metric equivalents.

Ordering Example: **EF3-SUSP-072-SS**

### ENDC End Cap

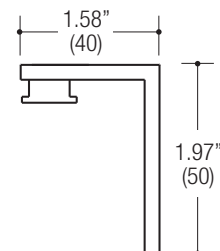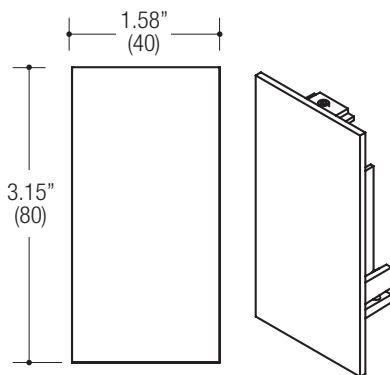

### Wall Mounting Bracket

#### ORDERING INFO

SERIES	FINISH
<b>EF3-A-M-ENDC</b> END CAP Mini LED Direct / Indirect Wall & Suspended Mount	<b>BB</b> Black <b>WW</b> White <b>XX</b> Custom

Ordering Example: **EF3-A-M-ENDC-BB**