
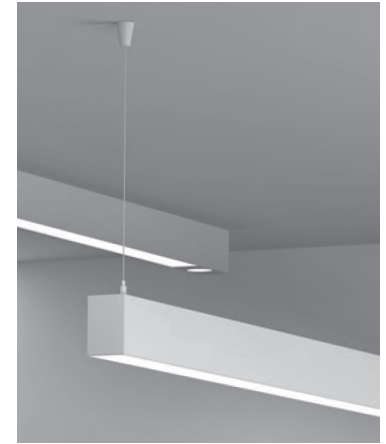


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in ( ) are metric equivalents.

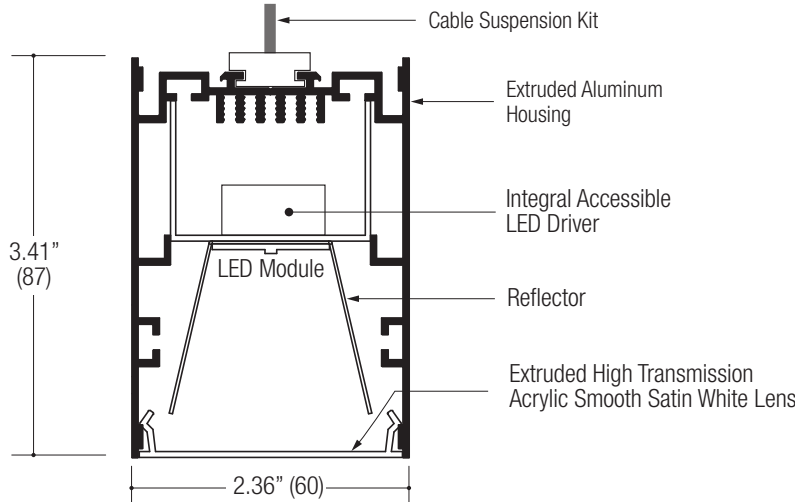

**EF300 Series  
SURFACE & SUSPENDED**

**Perfect Fit® technology** Engineered to provide seamless lighting in any length, the fixture can be ordered to the nearest inch. Contractor cuttable design insures perfect installations with minimal coordination by allowing the electrician to trim up to six inches from the length of fixture during installation.

#### CONSTRUCTION

- 2.36" (60) wide x 3.41" (87) tall extruded aluminum housing
- Die-cast aluminum end caps with concealed fasteners
- Locking joiners allow units to be connected for long straight runs
- Powder coat finish

#### LED Source

- Available at three power levels up to 1200 lumens per foot
- Tight binning ensures color consistency within 2 MacAdam ellipses
- Dense pitch for uniform output

#### OPTICS

- Smooth satin white extruded acrylic lens
- Integral bright white reflector

#### ELECTRICAL

- Field-replaceable integral LED driver
- Integral wiring compartment
- Integral thermal protection
- Easy maintenance access via lens assembly
- Quick disconnect through wiring for continuous runs

#### MOUNTING

- Surface mount
- Suspended cable mount
- Rigid pendant stem mount

#### LABELS

- Suitable for damp location

#### COMPONENTS

- See pages 2 and 3 for EF300 components (ie, L's, T's, End Caps, Mountings, etc.)




#### ORDERING INFO

SERIES	WATTAGE / FT	CRI / COLOR	LENS	DRIVER	LENGTH	VOLTS	FINISH	MOUNTING	CONFIG.
<b>EF3-B-M</b>  EF300 Small LED -Wall Mount -Surface Mount -Suspended Mount	<b>04F</b> 04W LED 440 lm / ft nom.	<b>80CRI</b> <b>8027</b> - 2700K <b>8030</b> - 3000K <b>8035</b> - 3500K	<b>LN</b> Satin white lens	<b>D2</b> 0-10V Dim. Driver (120-277V only)	<b>024</b> 24" 2ft <b>036</b> 36" 3ft <b>048</b> 48" 4ft <b>096</b> 96" 8ft	<b>1</b> 120V <b>U</b> 120-277V <b>0</b> None	<b>BB</b> Black <b>WW</b> White <b>XX</b> Custom	<b>SM</b> Surface Mount <b>SP</b> Suspension Mount (Includes SUSP kit & SUPL kit) <b>ST</b> Stem Mount (Includes STEM kit) <b>WM</b> Wall Mount Bracket	<b>COM</b> End Caps <b>EXT</b> No End Caps
	<b>08F</b> 08W LED 800 lm / ft nom.	<b>8040</b> - 4000K <b>90CRI</b> <b>9027</b> - 2700K <b>9030</b> - 3000K <b>9035</b> - 3500K	<b>CV*</b> Aluminum cover	<b>D3</b> Lutron Hi-lume™ Forward Phase 2 wire 1% (120V only) <b>D4</b> Lutron Hi-lume™ 3 wire 1% (120-277V only) <b>E4</b> Dimmable Lutron Hi-lume™ 1% EcoSystem™ LED driver (120-277V only) <b>NA</b> None	<i>Consult factory for custom lengths or patterns</i>				
	<b>12F</b> 12W LED 1200 lm / ft nom.	<b>0000*</b> - None Cover required  Consult factory for other CRI / Color options							
	<b>000*</b> None - cover required								
<b>EF3-B-M</b>									


Ordering Example: **EF3-B-M-04F-8027-LN-D2-024-1-BB-SP-COM**

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------


Measurements in ( ) are metric equivalents.






**ELL**  
90° Elbow  
Horizontal



**TEE**  
90° 3-Way  
Connection



**4WY**  
90° 4-Way  
Connection

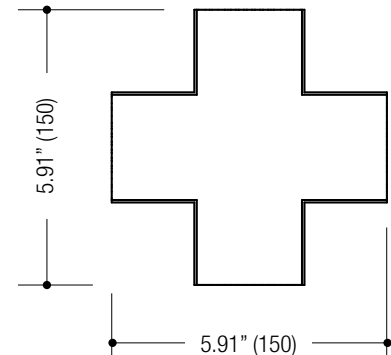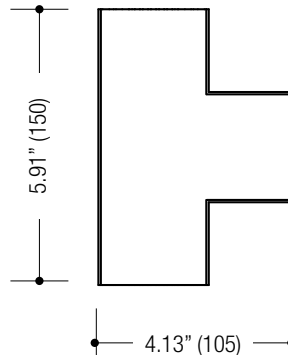

**FOR LIT CORNER OPTIONS CONSULT FACTORY**

**5 YEAR  
WARRANTY**  
Limited




**ORDERING INFO**

SERIES	WATTAGE / FT	CRI / COLOR	LENS	DRIVER	TYPE	VOLTAGE	FINISH
<b>EF3-B-M</b>	<b>000*</b> None - Cover Required	<b>0000*</b> None - Cover Required	<b>CV*</b> Aluminum Cover	<b>NA</b> None	<b>ELL</b> (Unlit) 90° Elbow Horizontal <b>TEE</b> (Unlit) "T" 3-WAY <b>4WY</b> (Unlit) "X" 4-WAY	<b>0</b> None	<b>BB</b> Black <b>WW</b> White <b>XX</b> Custom
<b>EF3-B-M</b>							


Ordering Example: **EF3-B-M-000-0000-CV-NA-ELL-0-BB**

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------




### SUSP Suspension Kit

- Surface mount canopy
- Standard surface mounting hardware
- Aircraft Cable 6' overall length
- Fixture mounting hardware

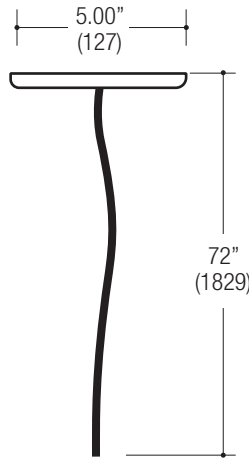

### SUPL Power Stem Kit

- Surface mount canopy
- Standard J-box surface mounting hardware
- Power supply line 6' overall length
- Connecting hardware

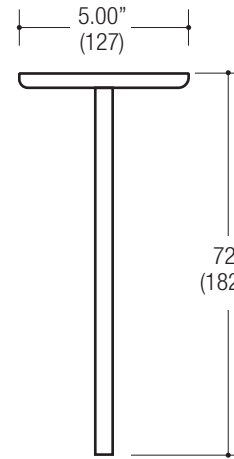

### STEM Stem Kit

- Surface mount canopy
- Standard surface mounting hardware
- Extruded aluminum stem 6' overall length
- Fixture mounting hardware

#### ORDERING INFO




SERIES	LENGTH	FINISH
<b>EF3-SUSP</b> SUSPENSION KIT	<b>072</b> 72" - 6' ft	<b>SS</b> Silver (EF3-SUSP only)
<b>EF3-STEM</b> STEM KIT		<b>BB</b> Black <b>WW</b> White <b>XX</b> Custom
<b>EF3-SUPL</b> POWER SUPPLY KIT		



Measurements in ( ) are metric equivalents.

Ordering Example: **EF3-SUSP-072-SS**

### ENDC End Cap



### Wall Mounting Bracket

#### ORDERING INFO

SERIES	FINISH
<b>EF3-B-M-ENDC</b> END CAP Small LED Wall / Surface / Suspended Mount	<b>BB</b> Black <b>WW</b> White <b>XX</b> Custom

Ordering Example: **EF3-B-M-ENDC-BB**