


DIRECT / INDIRECT

LED

MEDIUM

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in () are metric equivalents.

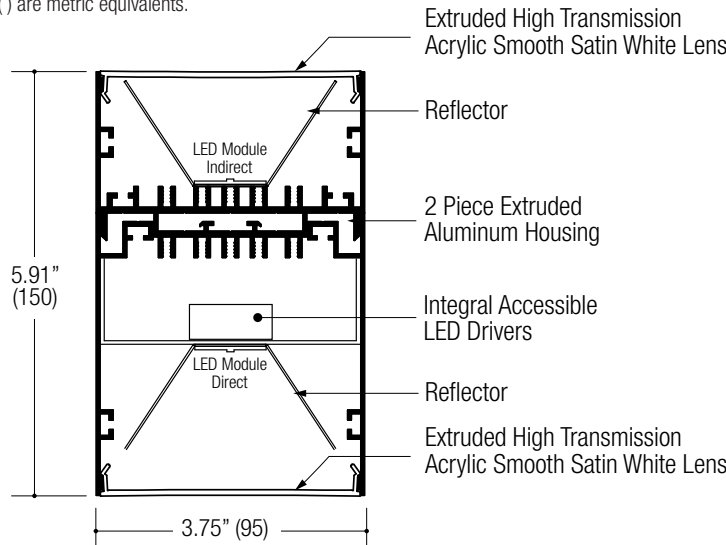

**EF300 Series
DIRECT / INDIRECT
WALL & SUSPENDED MOUNT**

Perfect Fit® technology Engineered to provide seamless lighting in any length, the fixture can be ordered to the nearest inch. Contractor cuttable design insures perfect installations with minimal coordination by allowing the electrician to trim up to six inches from the length of fixture during installation.

CONSTRUCTION

- 3.75" (95) wide x 5.91" (150) tall extruded aluminum housing
- Die-cast aluminum end caps with concealed fasteners
- Locking joiners allow units to be connected for long straight runs
- Powder coat finish

LED Source

- Available at three power levels up to 1200 lumens per foot
- Tight binning ensures color consistency within 2 MacAdam ellipses
- Dense pitch for uniform output
- **LED Downlight module, see components page 2**

OPTICS

- Smooth satin white extruded acrylic lens
- Integral bright white reflector

ELECTRICAL

- Field-replaceable integral LED drivers
- Integral wiring compartment in housing
- Integral thermal protection
- Easy maintenance access via lens assembly
- Quick disconnect through wiring for continuous runs

MOUNTING

- Wall mount
- Suspended cable mount
- Rigid pendant stem mount

LABELS

- Suitable for damp location

COMPONENTS

- See pages 2 and 3 for EF300 components (ie, L's, T's, End Caps, Mountings, etc.)

**5 YEAR
WARRANTY**
Limited




ORDERING INFO

SERIES	DIRECT WATTAGE	INDIRECT WATTAGE	CRI / COLOR	LENS	DRIVER	LENGTH	VOLTS	FINISH	MOUNTING	CONFIG.
EF300 Medium LED Direct / Indirect -Wall Mount -Suspended Mount	04F 04W LED 440 lm / ft nom.	04F 04W LED 440 lm / ft nom.	80CRI 8027 - 2700K 8030 - 3000K 8035 - 3500K 8040 - 4000K	LN Satin white lens	D2 0-10V Dim. Driver (120-277V only) D3 Lutron Hi-lume™ Forward Phase 2 Wire 1% (120V only) D4 Lutron Hi-lume™ 3 wire 1% (120-277V only) E4 Dimmable Lutron Hi-lume™ 1% EcoSystem™ LED driver (120-277V only) NA None	024 24" 2ft 036 36" 3ft 048 48" 4ft 096 96" 8ft <i>Consult factory for custom lengths or patterns</i>	1 120V U 120-277V 0 None	BB Black WW White XX Custom	SP Suspension Mount (Includes SUSP kit & SUPL kit) ST Stem Mount (Includes STEM kit) WM Wall Mount (Brackets includes)	COM End Caps EXT No End Caps
	08F 08W LED 800 lm / ft nom.	08F 08W LED 800 lm / ft nom.	90CRI 9027 - 2700K 9030 - 3000K 9035 - 3500K 0000* - None Cover required <i>Consult factory for other CRI / Color options</i>	CV* Aluminum cover						
	12F 12W LED 1200 lm / ft nom.	12F 12W LED 1200 lm / ft nom.								
	000* None - Cover required	000* None - Cover required								
EF3-C-D										



Ordering Example: **EF3-C-D-12F-08F-8027-LN-D2-024-1-BB-ST-COM**

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------



Measurements in () are metric equivalents.

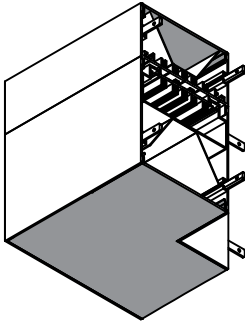


ELL
90° Elbow
Horizontal

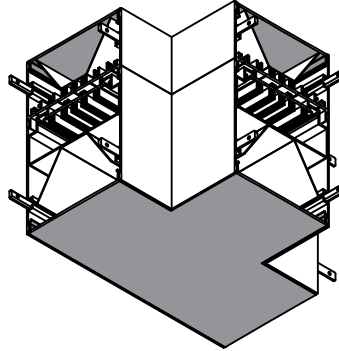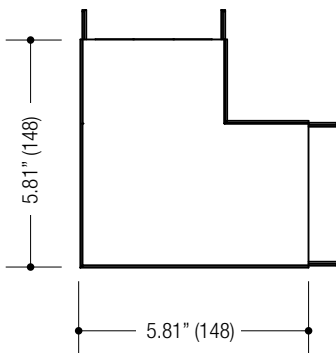

TEE
90° 3-Way
Connection

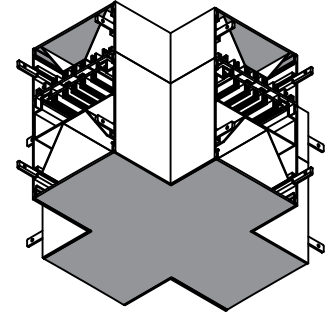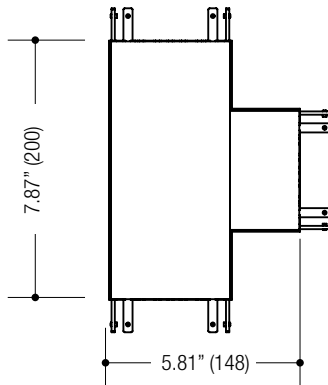

4WY
90° 4-Way
Connection

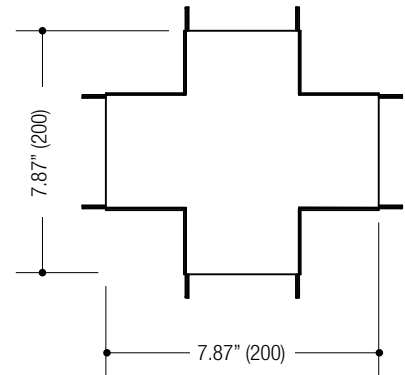

FOR LIT CORNER OPTIONS CONSULT FACTORY

5 YEAR WARRANTY
Limited




ORDERING INFO

SERIES	DIRECT WATTAGE	INDIRECT WATTAGE	CRI / COLOR	LENS	DRIVER	TYPE	VOLTAGE	FINISH
EF3-C-D	000* None - Cover Required	000* None - Cover Required	0000* None - Cover Required	CV* Aluminum Cover	NA None	ELL (Unlit) 90° Elbow Horizontal TEE (Unlit) "T" 3-WAY 4WY (Unlit) "X" 4-WAY	0 None	BB Black WW White XX Custom
EF300 Medium LED Direct / Indirect -Wall Mount -Suspended Mount								
EF3-C-D								


Ordering Example: **EF3-C-D-000-000-0000-CV-NA-ELL-0-BB**

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

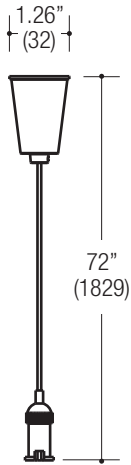


SUSP Suspension Kit

- Surface mount canopy
- Standard surface mounting hardware
- Aircraft Cable 6' overall length
- Fixture mounting hardware

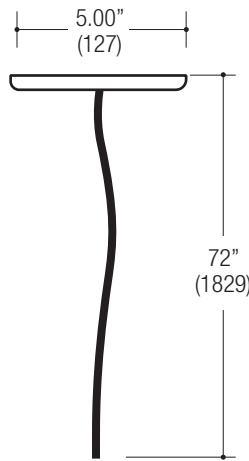

SUPL Power Supply Kit

- Surface mount canopy
- Standard J-box surface mounting hardware
- Power supply line 6' overall length
- Connecting hardware
- Use with suspension kit to supply power

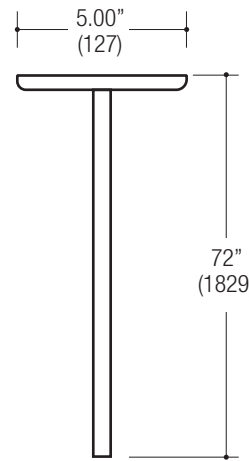

STEM Stem Kit

- Surface mount canopy
- Standard surface mounting hardware
- Extruded aluminum stem 6' overall length
- Fixture mounting hardware
- Includes power supply within stem



ORDERING INFO

SERIES	LENGTH	FINISH
EF3-CD-SUSP SUSPENSION KIT	072 72" - 6' ft	SS Silver (EF3-SUSP only)
EF3-SUPL POWER SUPPLY KIT		BB Black WW White XX Custom
EF3-STEM STEM KIT		

Measurements in () are metric equivalents.

Ordering Example: **EF3-CD-SUSP-072-SS**

ENDC End Cap

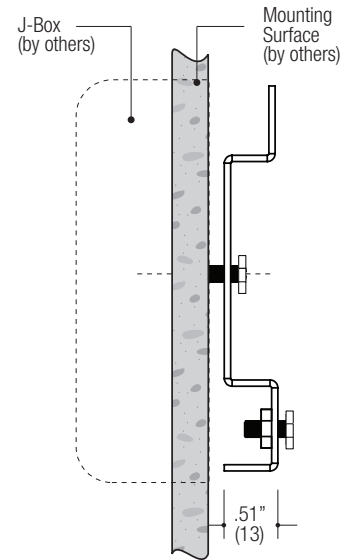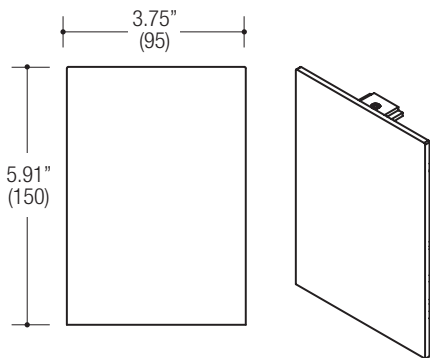

Wall Mounting Bracket (Ships full length of fixture)

ORDERING INFO

SERIES	FINISH
EF3-C-D-ENDC END CAP Mini LED Direct / Indirect Wall & Suspended Mount	BB Black WW White XX Custom

Ordering Example: **EF3-C-D-ENDC-BB**