


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

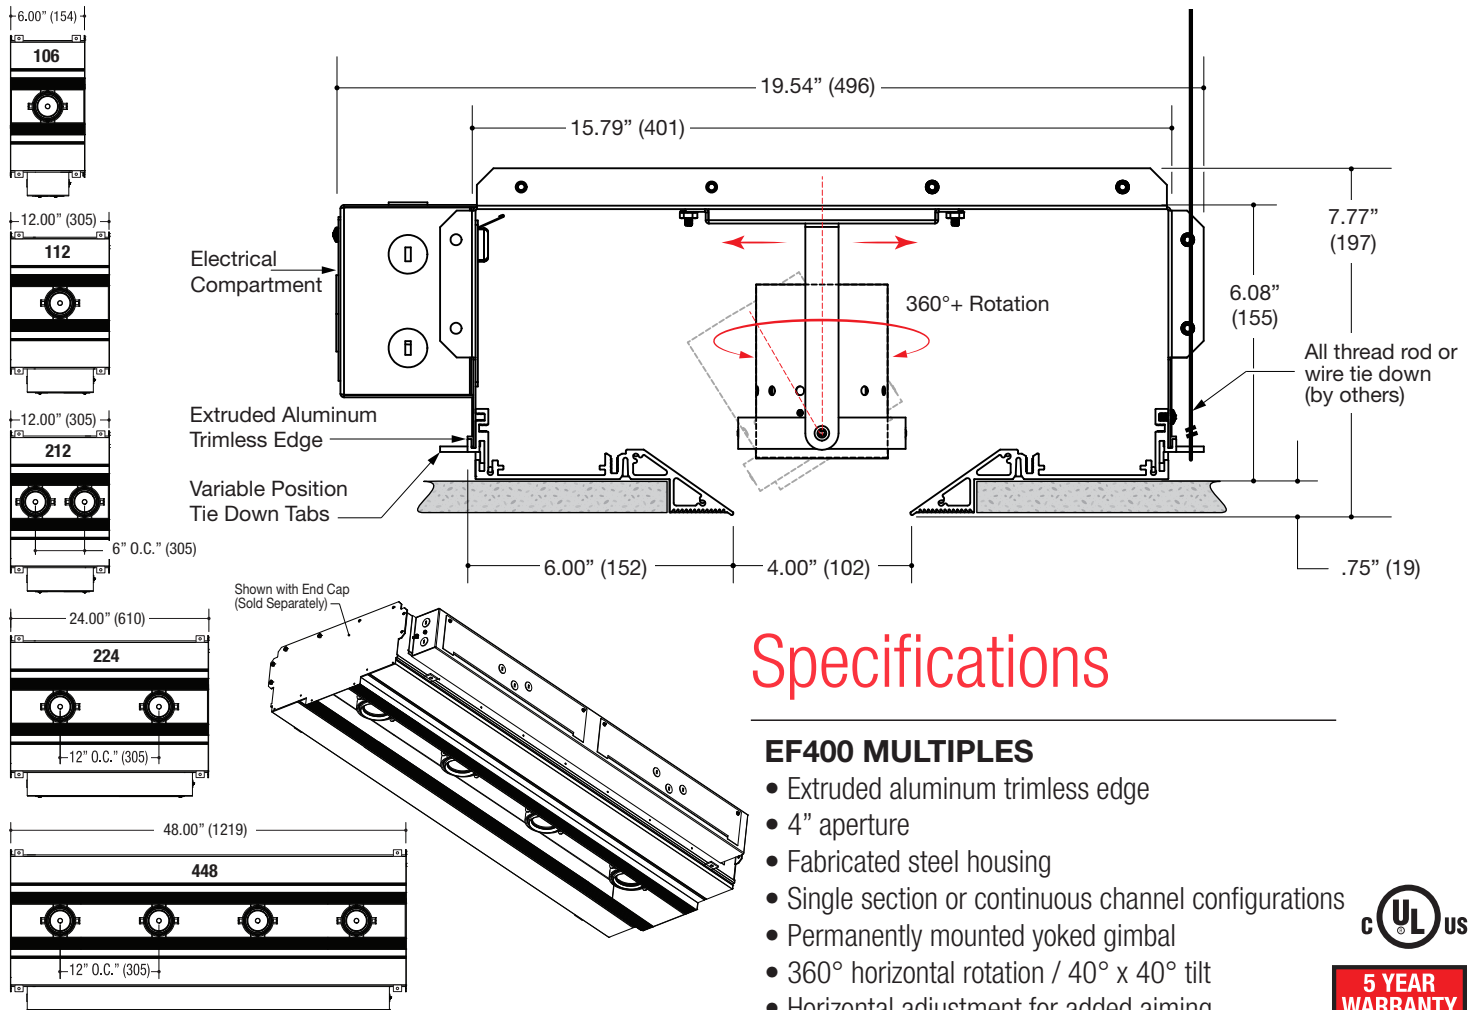

## Specifications

### EF400 MULTIPLES

- Extruded aluminum trimless edge
- 4" aperture
- Fabricated steel housing
- Single section or continuous channel configurations
- Permanently mounted yoked gimbal
- 360° horizontal rotation / 40° x 40° tilt
- Horizontal adjustment for added aiming



**5 YEAR WARRANTY**  
Limited

### ORDERING INFO


SERIES	LENGTH	LED MODULE WATTAGE AND INFORMATION	CRI / COLOR	BEAM	DRIVER	VOLTAGE	FINISH
<b>EF4BNS</b>  <b>MULTIPLES</b> <b>EF400 Series</b> Recessed 1-4-Light Configurations Trimless Edge New Construction Housing	<b>106</b> 1 Light / 6"	<b>BRIDGELUX</b> <b>08L</b> 08W LED / 600lm nom. <b>11L</b> 11W LED / 825lm nom. <b>16L</b> 16W LED / 1100lm nom.	<b>8027</b> 80CRI / 2700K Bridgelux / CREE <b>8030</b> 80CRI / 3000K Bridgelux / CREE <b>8035</b> 80CRI / 3500K Bridgelux / CREE <b>8040</b> 80CRI / 4000K Bridgelux / CREE <b>9027</b> 90CRI / 2700K Bridgelux Only <b>9030</b> 90CRI / 3000K Bridgelux Only <b>9727</b> 97CRI / 2700K Bridgelux Only <b>9730</b> 97CRI / 3000K Bridgelux Only	<b>BRIDGELUX</b> <b>N</b> Narrow 20° <b>M</b> Medium 28° <b>W</b> Wide 40° <b>V</b> Very Wide 74°	<b>D1</b> Phase Dimming (120V only) <b>D2</b> 0-10V Dimming (120-277V only) <b>D3</b> Lutron Hi-lume™ Forward Phase (120V only) <b>D4</b> Lutron Hi-lume™ EcoSystem™ & 3 wire 1% (120-277V only)	<b>1</b> 120V <b>U</b> 120-277V	<b>BB</b> Black <b>WW</b> White <b>XX</b> Custom
	<b>112</b> 1 Light / 12"	<b>CREE</b> <b>07C</b> 07W LED / 700lm nom. <b>09C</b> 09W LED / 900lm nom. <b>14C</b> 14W LED / 1200lm nom. <b>20C</b> 20W LED / 1600lm nom.	<b>9527</b> 95CRI / 2700K CREE Only <b>9530</b> 95CRI / 3000K CREE Only <b>9535</b> 95CRI / 3500K CREE Only <b>9540</b> 95CRI / 4000K CREE Only	<b>CREE</b> <b>N</b> Narrow 16° <b>M</b> Medium 28° <b>W</b> Wide 42° <b>V</b> Very Wide 73°	<b>DE</b> Lutron Hi-lume™ EcoSystem™ 1% with Soft-On, Fade-to-Black™ (120-277V only)		
	<b>212</b> 2 Lights / 12"	<b>ValuDIM™</b> <b>15V</b> 15W LED / 810lm nom. 3000-2000K Warm Dimming	<b>9220</b> 92CRI / 3000-2000K Warm Dimming ValuDIM Only	<b>ValuDIM™</b> <b>N</b> Narrow 17° <b>M</b> Medium 25° <b>W</b> Wide 38°			
	<b>224</b> 2 Lights / 24"						
	<b>448</b> 4 Lights / 48"						

Example: **EF4BNS-106-20C-8027-N-D2-U-BB**


PROJECT

TYPE

CATALOG NUMBER

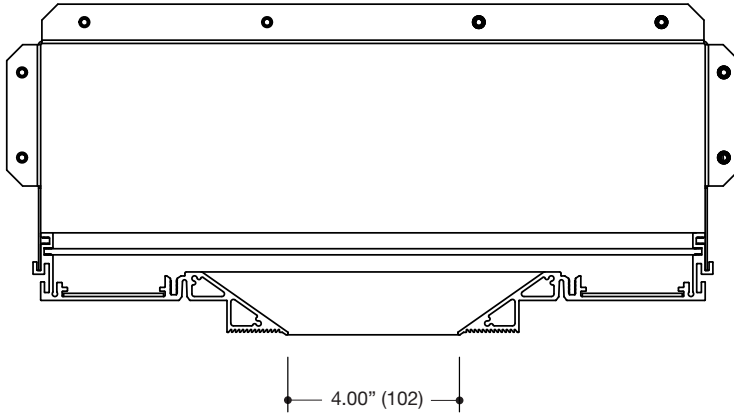

**HORSESHOE END CAP**

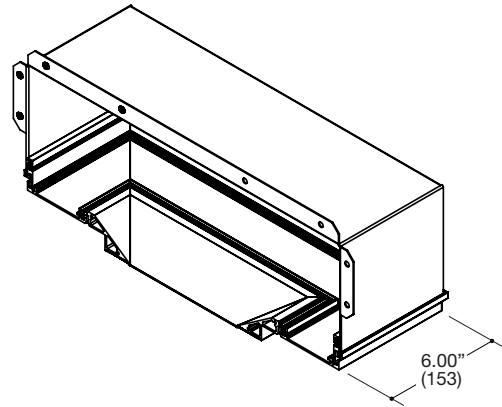

## Specifications


### EF4B Channel

- Extruded aluminum trimless edge
- Fabricated steel housing
- Hardware provided


### ORDERING INFO

SERIES	FINISH
<b>EF4BNS-HE</b>	<b>BB</b> Black
<b>EF400 System</b>	<b>WW</b> White
Horseshoe End Cap	<b>XX</b> Custom
Trimless edge	

Ordering Example: **EF4BNS-HE-BB**

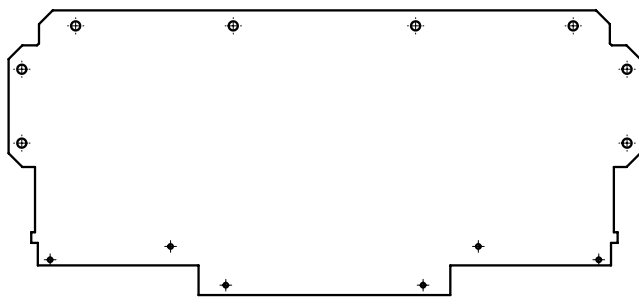

**FLAT END CAP**

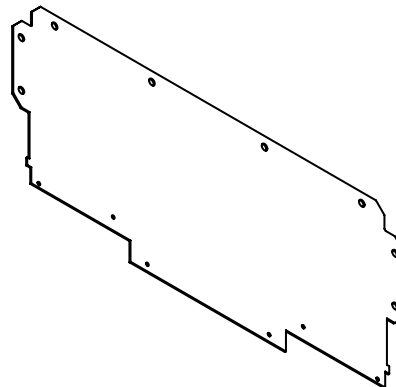

## Specifications

### EF4B Channel

- Stamped trimless edge
- Hardware provided

### ORDERING INFO


SERIES	FINISH
<b>EF4BNX-EC</b>	<b>BB</b> Black
<b>EF400 System</b>	<b>WW</b> White
Flat End Cap	<b>XX</b> Custom
Trimless edge	

Ordering Example: **EF4BNX-EC-BB**




PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------


Measurements in ( ) are metric equivalents.

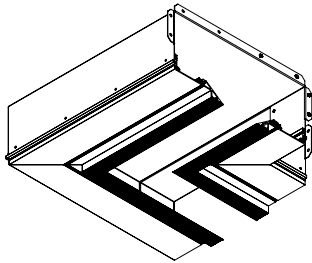




**EL**  
90° Elbow  
Connection

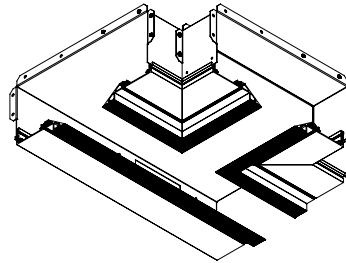

**TE**  
90° 3-Way  
Connection

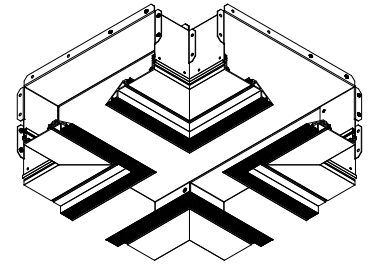

**XC**  
90° 4-Way  
Connection

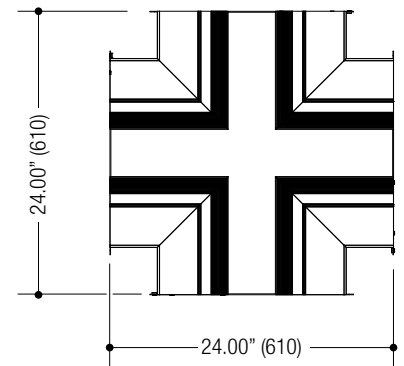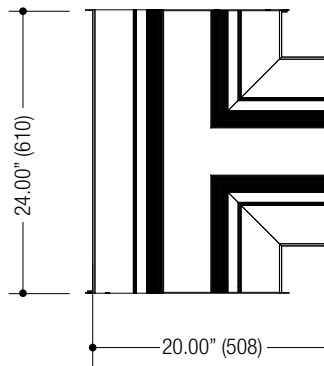


## Specifications

### EF4B Channel

- Extruded aluminum trimless edge
- 4" aperture
- Fabricated steel housing
- Hardware provided

### TRIMLESS EDGE DETAIL

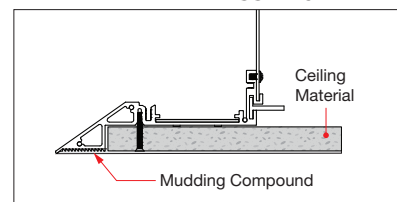

### ORDERING INFO

SERIES	TYPE	FINISH
<b>EF4BNS</b>	<b>EL</b> 90° Elbow	<b>BB</b> Black <b>WW</b> White <b>XX</b> Custom
<b>EF400</b> Small Connections New Construction Housing	<b>TE</b> "T" 3-WAY <b>XC</b> "X" 4-WAY	
<b>EF4BNS</b>		

Ordering Example: **EF4BNS-EL-BB**

