


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in () are metric equivalents.

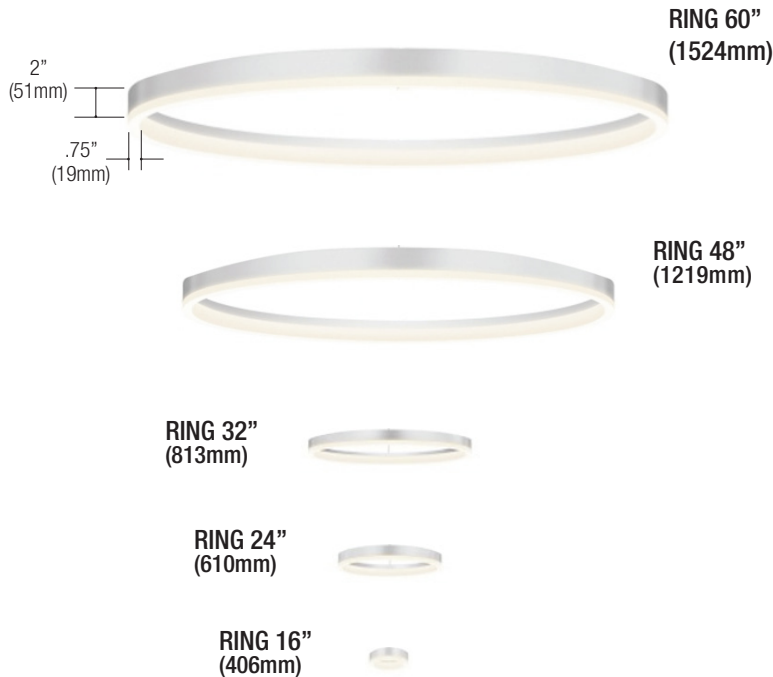

Specifications

CONSTRUCTION

- Die formed circular steel LED housing
- Molded satin acrylic lens
- Spun steel canopy and driver enclosure
- Powder coat finish

LED SOURCE

- LED strip circumferentially mounted
- 19W / 823lm, 90CRI / 3000K - 16" Diameter
- 28W / 1419lm, 90CRI / 3000K - 24" Diameter
- 32W / 1581lm, 90CRI / 3000K - 32" Diameter
- 47W / 2337lm, 90CRI / 3000K - 48" Diameter
- 60W / 3567lm, 90CRI / 3000K - 60" Diameter

ELECTRICAL

- Field accessible junction box wiring with power supply enclosure, access from below
- Integral thermo protection
- LED driver located in Ø5" x 1.75" tall canopy

MOUNTING


- Canopy mounted directly to junction box
- Canopy, 6' aircraft cable, cable grip hardware (adjustable) and power lead

LABELS


- Suitable for damp location

RINGER SUSPENSION

**3 CABLE
CANOPY SUSPENSION**
16" RING
24" RING
32" RING
48" RING



**4 CABLE
CANOPY SUSPENSION**
60" RING



**5 YEAR
WARRANTY**
Limited



ORDERING INFO

SERIES	WATTAGE / SIZE	CRI / COLOR	POWER SUPPLY	FINISH
RINGER GlowSTX™ Ringer Pendant Mount Ambient Lighting	19L 16" diameter 19W LED / 823lm (@ 90CRI min / 3000K)	9030 90CRI / 3000K <i>(Other color temperatures available with special orders)</i>	DMU* Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V) * Not available in 60L - 60" Ring	SS Silver <i>(White or Black finish available with special orders)</i>
	28L 24" diameter 28W LED / 1419lm (@ 90CRI min / 3000K)			
	32L 32" diameter 32W LED / 1581lm (@ 90CRI min / 3000K)			
	47L 48" diameter 47W LED / 2337lm (@ 90CRI min / 3000K)			
	60L 60" diameter* 60W LED / 3567lm (@ 90CRI min / 3000K)			
RINGER			D2U 0-10V Dimming 120-277V	

Ordering Example: **RINGER-28L-9030-DMU-SS**