


**LED**

**INTEGRAL DRIVER**

**SMALL**

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in ( ) are metric equivalents.

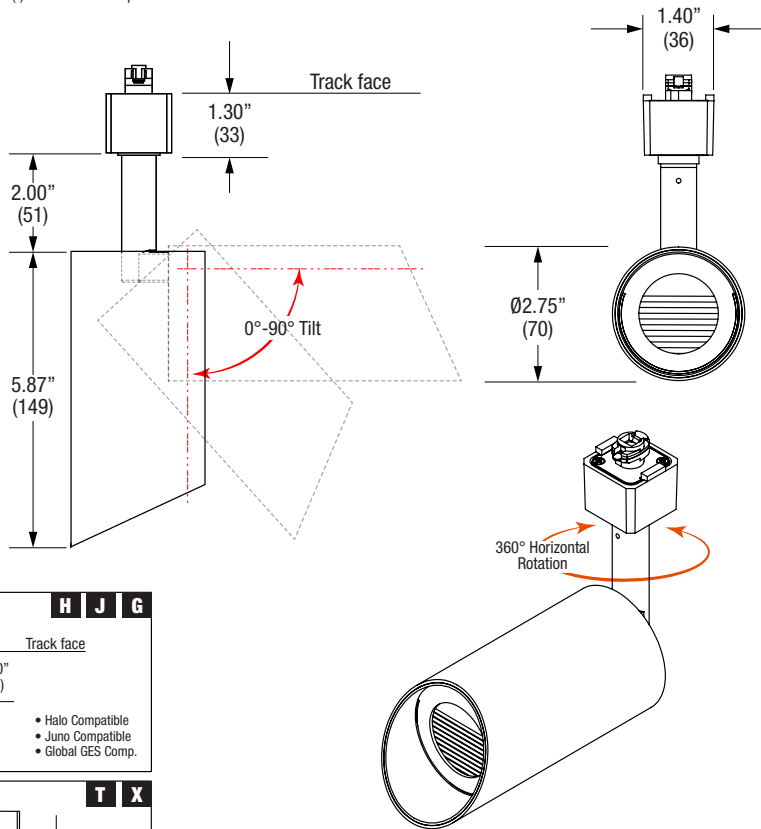

## Specifications

### WALLWASH TRACKHEAD

- 2.75" diameter cylinder shaped trackhead
- 0° - 90° vertical tilting / 360° horizontal rotation
- Constant friction
- Die cast aluminum housing
- LED optical grade reflector (wallwash function)
- Powder coat finish

### LED SOURCE

- CREE
- ValuDIM™ Warm dimming

### ELECTRICAL

- Fully integral LED driver
- Phase dimmable (277V non-dimmable)

### MOUNTING

- Compatible with Halo®, Juno®, Global® GES track, Global® XTS track, Global® TEK track, Global® HTEK track

### LABELS



- Suitable for dry location



**5 YEAR WARRANTY**

Limited

### Track Adapters

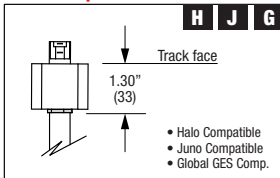

Halo® is a registered trademark of Cooper Industries,  
 Juno® is a registered trademark of Juno Lighting,  
 Global® is a registered trademark of Nordic Aluminium.

### ORDERING INFO

SERIES	ADAPTER	WATTAGE	CRI / COLOR	BEAM	DRIVER	FINISH
<b>TRA29B</b> <b>JULIE</b> Wallwash Trackhead Die-Cast Aluminum Adjustable Aim	<b>H</b> Halo® compatible*† <b>J</b> Juno® compatible* † <b>G</b> Global® GES compatible* † <b>T</b> Global® TEK compatible* <b>K</b> Global® HTEK compatible** <b>X</b> Global® XTS compatible*	<b>08C</b> 8W LED 801 lm del. <b>13C</b> 13W LED 1078 lm del. <b>15C</b> 15W LED 1208 lm del.  Delivered @ 80CRI / 3000K Narrow Beam	<b>8027</b> 80CRI / 2700K <b>8030</b> 80CRI / 3000K <b>8035</b> 80CRI / 3500K <b>8040</b> 80CRI / 4000K <b>9227</b> 92CRI / 2700K <b>9230</b> 92CRI / 3000K <b>9235</b> 92CRI / 3500K <b>9240</b> 92CRI / 4000K <b>9827</b> 98CRI / 2700K <b>9830</b> 98CRI / 3000K <b>9835</b> 98CRI / 3500K <b>9840</b> 98CRI / 4000K	<b>W</b> Wide	<b>D11</b> Phase Dimming 120V <b>LD2</b> Non Dimming 277V (K adaptor only)	<b>BB</b> All Black <b>WB</b> White with Black Bezel <b>WW</b> All White <b>SB</b> Silver with Black Bezel  Consult factory for custom colors
	* D11 only ** LD2 only  † One Circuit Compatible Only	<b>ValuDIM™</b> <b>15V</b> 15W LED / 712lm del. / 3000- 1800K Warm Dimming Delivered @ 92CRI / 3000K Narrow Beam	<b>9220</b> 92CRI / 3000-1800K Warm Dimming (ValuDIM Only)			

Ordering Example: **TRA29B-K-13C-8030-W-LD2-WW**