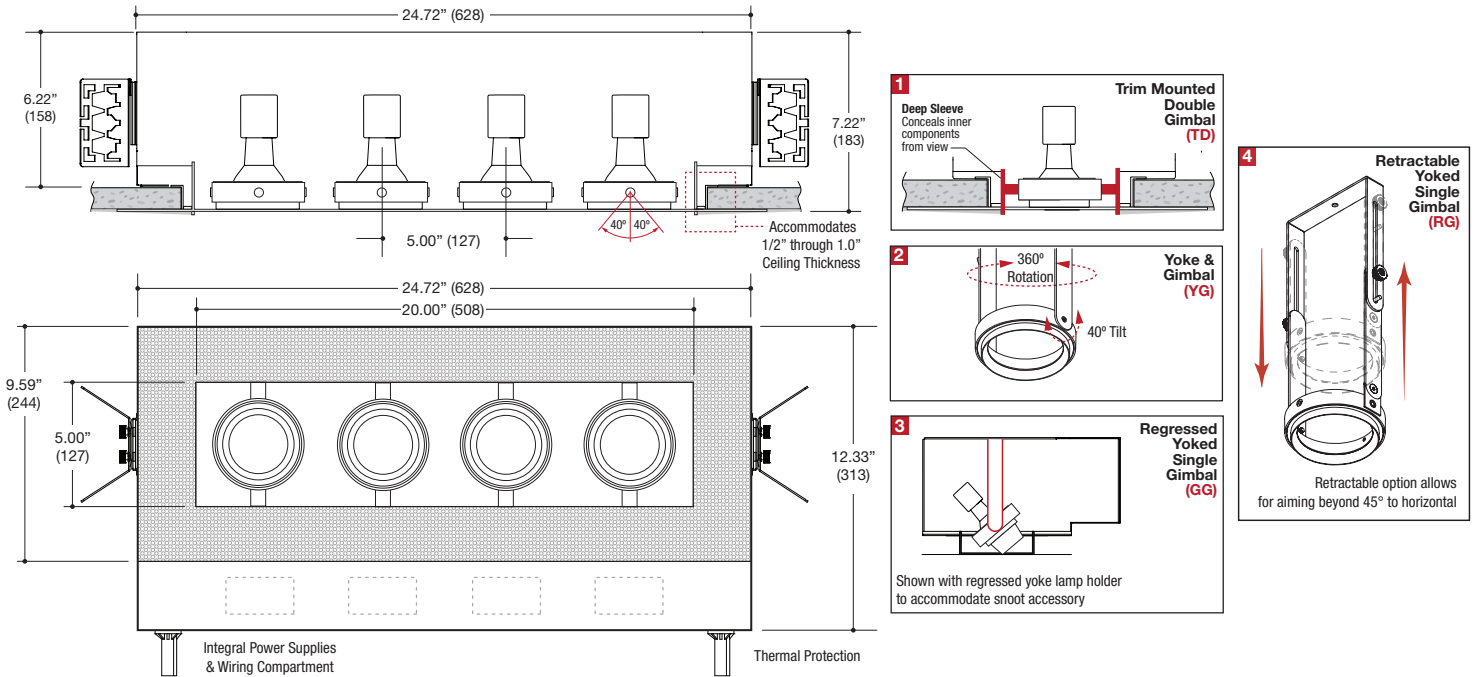


| | | |
|---------|------|----------------|
| PROJECT | TYPE | CATALOG NUMBER |
|---------|------|----------------|



DESCRIPTION

- Four light recessed accent / downlight - medium size
- All steel 18GA construction with powder coat finish
- Trimless insert with 5" x 20" open aperture
- Perforated metal mesh frame for mudding right to the aperture
- Vent holes for cooler operating temperature
- Trimless insert features deep sleeve to conceal inner components
- Insert sleeve removable for maintenance
- **Ceiling Cut-Out - 6.12" x 21.12"**

LAMPS (not included)

- 120V PAR20 Halogen 50W max - Derate Labels Available
- PAR20MH 20W or 39W
- Accepts up to 2 or more optical accessories, dependent on lamp
- Double gimbal lamp holder with up to 40° x 40° tilt aiming
- Trim mounted double gimbal standard with optional single gimbal flush yoke, regressed yoke or adjusting retractable yoke

ELECTRICAL

- Integral metal halide ballast (no power supply for line voltage lamps)
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable (line voltage only)

MOUNTING

- Butterfly brackets for commercial installation in drywall and other mud in ceiling types
- Continuously variable plate adjusts for 1/2" through 1.0" ceilings
- Heavy -Duty **L-Bars™** hanger bar system ordered separately
LF #LBARS4PK








LABELS

- Suitable for damp location

ORDERING INFO

| SERIES | WATTAGE / LAMP | LAMP ASSEMBLY | POWER SUPPLY | VOLTAGE | FINISH | OPTIONS |
|---|--|--|---|---------------|------------------|--------------------------|
| MF34CN-S MULTIFORMS MF300 Series Recessed 4-Light Straight Aperture Adjustable Accent Trimless Fixture New Construction Housing | 030PR20X PAR20 30W max | TD Trim Mounted Double Gimbal | EB Electronic Metal Halide Ballast | 1 120V | BB Black | CP Chicago Plenum |
| | 040PR20X PAR20 40W max | YG Yoke Gimbal Flush to Ceiling Line | NA None - Line voltage lamps | 2 277V | WW White | |
| | 050PR20X PAR20 50W max | GG Regressed Yoked Gimbal* | | | SS Silver | |
| | 020CR20X PAR20MH 20W 039CR20X PAR20MH 39W | RG Retractable Yoked Gimbal | | | XX Custom | |
| MF34CN-S | 015PR20X LED Retrofit | * Required to enable flush appearance with snoot accessory | | | | |

Ordering Example: **MF34CN-S-050PR20X-TD-NA-1-BB-CP**


| OPTICAL ACCESSORY | DESCRIPTION | LIGHT SOURCE |
|---|---------------------------------|--|
| | | MEDIUM |
| | | <ul style="list-style-type: none"> • PAR20 • PAR20CMH • T4GU6.5 • 70mm LED |
|  | Clear Lens | OPTC-CLR |
|  | UV Lens | OPTC-UVL |
|  | Hex Cell Louver | OPTC-HXL |
|  | Diffusion Lens | OPTC-DFL |
| | Diffusion Lens - LED Film | OPTC-L-DFL |
|  | Linear Spread Lens | OPTBC-LSL |
| | Linear Spread Lens - LED Film | OPTC-L-LSL |
|  | Prismatic Spread Lens | OPTC-PSL |
|  | Snoot - Black | OPTC-SNB |
| | Snoot - White | OPTC-SNW |
| | Snoot - Silver | OPTC-SNS |
| | Snoot - White With Black Splay | OPTC-SNWB |
| | Snoot - Silver With Black Splay | OPTC-SNSB |

* Other filters, colored glass, dichroics & micro-lenses available upon request

LED Performance Chart

BRIDGELUX

| WATTAGE / LUMENS | CRI / COLOR | BEAM |
|----------------------------------|---------------------------|------------|
| 17L 17W LED / 1700lm nom. | 8027 80CRI / 2700K | N |
| 22L 22W LED / 2200lm nom. | 8030 80CRI / 3000K | Narrow 22° |
| | 8035 80CRI / 3500K | M |
| | 8040 80CRI / 4000K | Medium 43° |
| | 9027 90CRI / 2700K | W |
| | 9030 90CRI / 3000K | Wide 58° |
| | 9727 97CRI / 2700K | |
| | 9730 97CRI / 3000K | |



CREE

| WATTAGE / LUMENS | CRI / COLOR | BEAM |
|----------------------------------|---------------------------|------------|
| 20C 20W LED / 1800lm nom. | 8027 80CRI / 2700K | N |
| 28C 28W LED / 2200lm nom. | 8030 80CRI / 3000K | Narrow 14° |
| | 8035 80CRI / 3500K | M |
| | 8040 80CRI / 4000K | Medium 30° |
| | 9527 95CRI / 2700K | W |
| | 9530 95CRI / 3000K | Wide 40° |
| | 9535 95CRI / 3500K | |
| | 9540 95CRI / 4000K | |

