


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in () are metric equivalents.

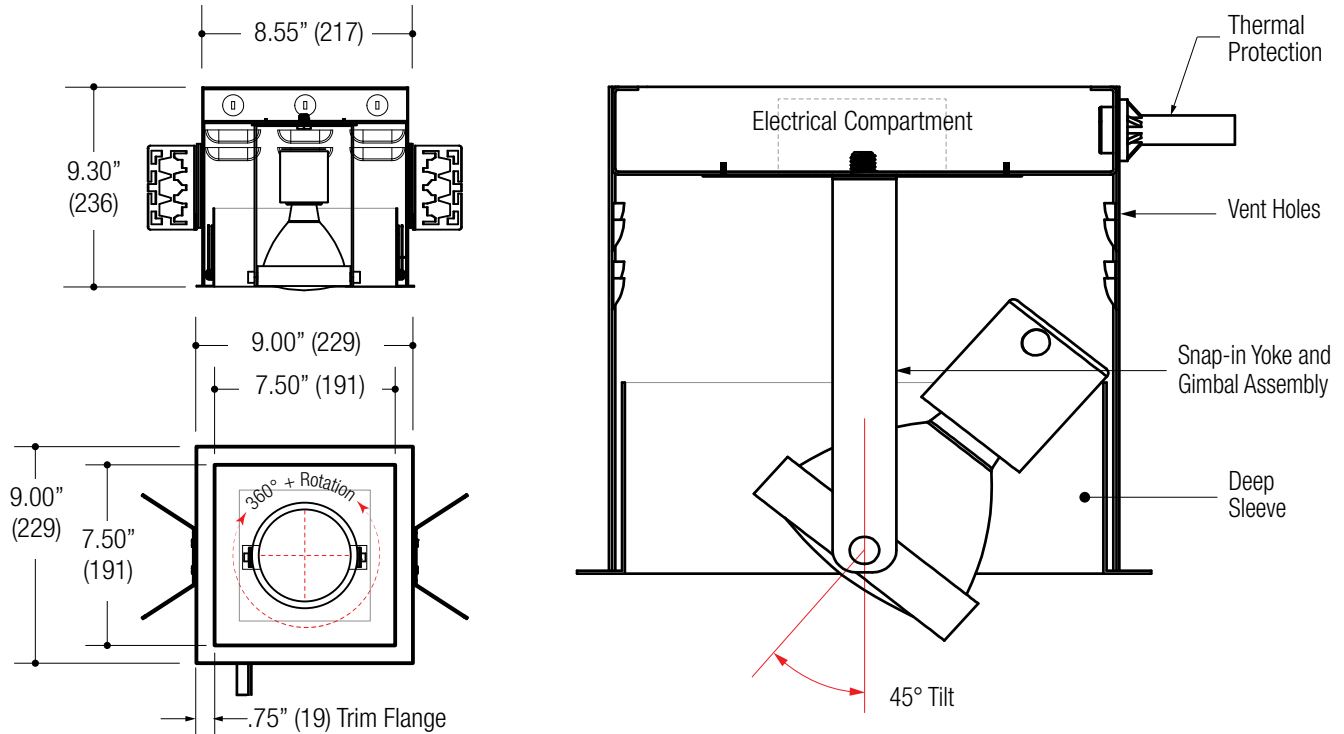

DESCRIPTION

- One light recessed accent / downlight - large
- All steel 18GA construction housing - powder coat finish
- .75" Trim flange on all sizes
- Trim flange removable for maintenance
- Vent holes for cooler operating temperature
- Trim features deep sleeve to conceal inner components

LAMPS (not included)

- 120V PAR30 Halogen 75W max - Derate Labels Available
- PAR30MH 20W, 39W or 70W
- PAR30 20W LED Retrofit
- Yoke gimbal lamp holder with up to 45° tilt aiming
- Yoke with 360°+ rotation

ELECTRICAL

- Electrical wiring compartment integrated into housing construction
- Snap-in yoke and gimbal assembly for easy maintenance access
- Thermal protection
- Rated for through-branch wiring
- Dimmable

MOUNTING

- Butterfly brackets for commercial installation in drywall, wood, stone, acoustic tile, or other ceiling types

LABELS

- Suitable for damp location



ORDERING INFO

SERIES	WATTAGE / LAMP	POWER SUPPLY	VOLTAGE	FINISH	ACCESSORIES
MF41DN-T MULTIFORMS MF400 Series Recessed 1-Light Adjustable Accent Trimmed Fixture New Construction Housing	040PR30X PAR30 40W max 050PR30X PAR30 50W max 075PR30X PAR30 75W max	NA None - Line voltage lamps EB Electronic Metal Halide Ballast	1 120V 2 277V 3 347V*	BB Black WW White WB White Trim / Black Interior SS Silver SB Silver Trim / Black Interior XX Custom	EM Emergency Relay
	020CR30X PAR30MH 20W 039CR30X PAR30MH 39W 070CR30X PAR30MH 70W				
	020PR30X PAR30 20W LED Retrofit				
MF41DN-T					

Ordering Example: **MF41DN-T-020PR30X-NA-1-BB-EM**