



PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in () are metric equivalents.

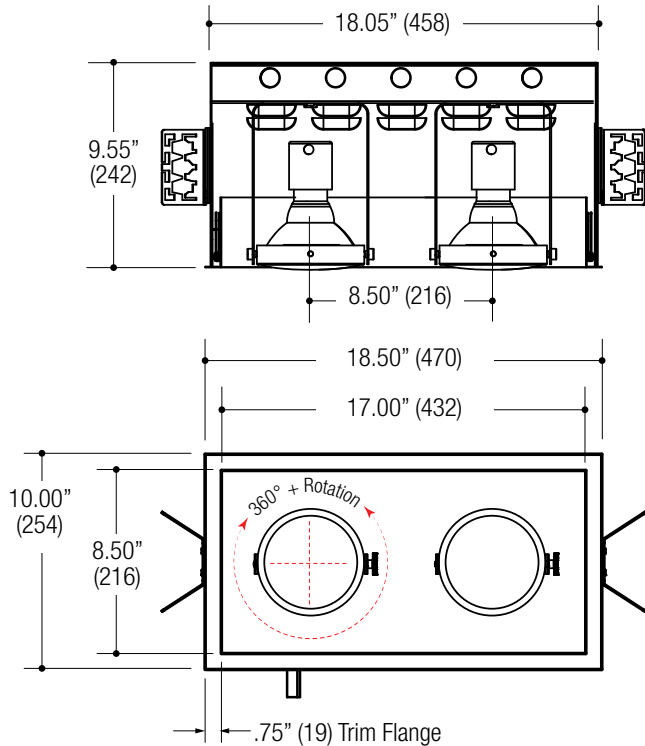

Specially Designed for LED Retrofit lamps

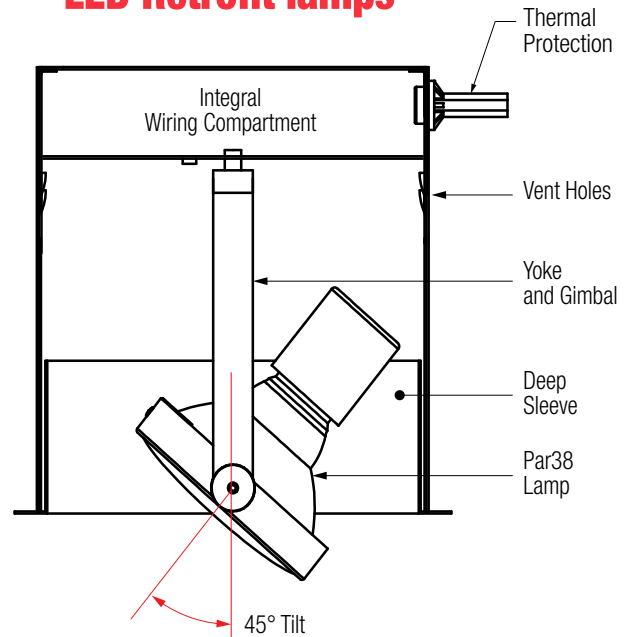

DESCRIPTION

- Two light recessed accent / downlight - large size
- All steel 18GA construction housing
- .75" Trim flange on all sizes
- Trim flange removable for maintenance
- Vent holes for cooler operating temperature
- Trim features deep sleeve to conceal inner components
- Powder coat finish

LAMPS (not included)

- 120V PAR38 Halogen 25W max - LED retrofit
- Yoke gimbal lamp holder with up to 45° tilt aiming
- Yoke with 360°+ rotation

ELECTRICAL

- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable

MOUNTING

- Butterfly brackets for commercial installation in drywall, wood, stone, acoustic tile, or other ceiling types

LABELS

- Suitable for damp location



ORDERING INFO

SERIES	WATTAGE / LAMP	POWER SUPPLY	VOLTAGE	FINISH	ACCESSORIES
MF42EN-T MULTIFORMS MF400 Series Recessed 2-Light Adjustable Accent Trimmed Fixture New Construction Housing	025PR38X PAR38 25W max LED Retrofit	NA None - Line voltage lamps	1 120V 2 277V* * Lamp must be rated for 277V	BB Black WW White WB White Trim / Black Interior SS Silver SB Silver Trim / Black Interior XX Custom	EM Emergency Relay
MF42EN-T					

Ordering Example: **MF42EN-T-025PR38X-NA-1-BB-EM**