

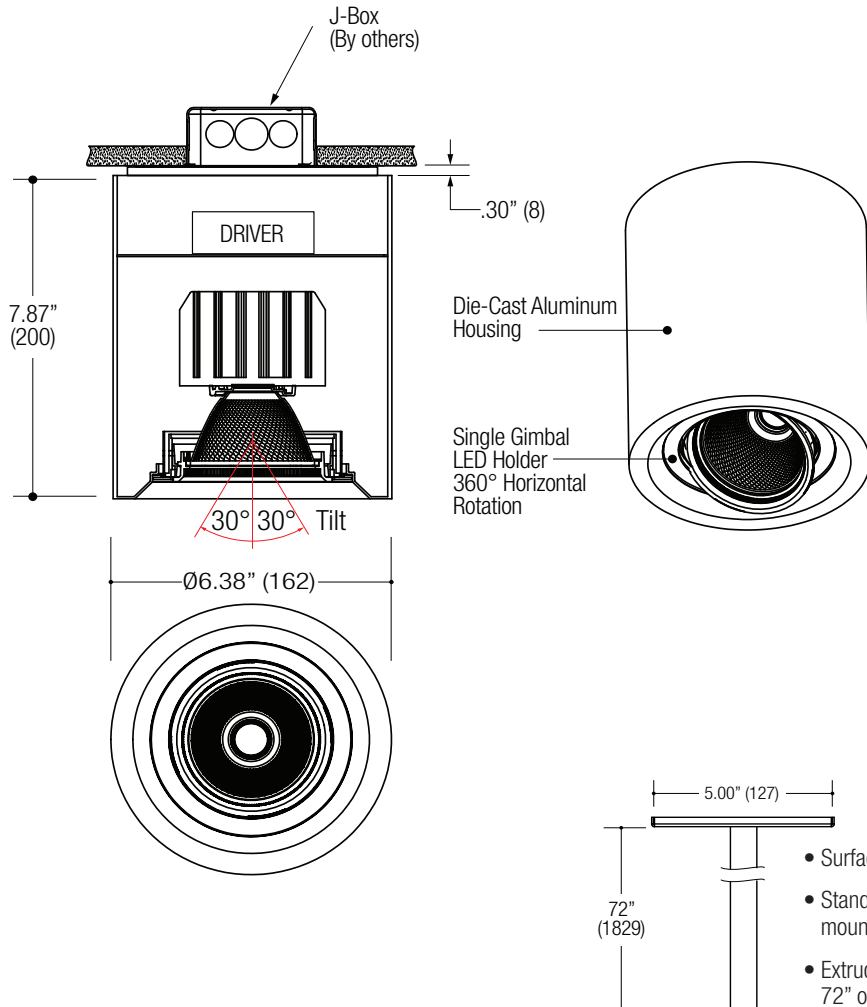
LED

INTEGRAL DRIVER

MEDIUM

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in () are metric equivalents.



ROUND HOUSING

- Single downlight accent fixture / medium size
- Die-cast aluminum housing
- Single gimbal lamp holder
- 360° horizontal rotation
- 30° x 30° tilt aiming

LED SOURCE



- Field-replaceable integral LED module
- Field-changeable optics
- 14W / 1200lm (@ 80CRI min / 3000K)
- 20W / 1600lm (@ 80CRI min / 3000K)
- 28W / 2200lm (@ 80CRI min / 3000K)

ELECTRICAL

- Field accessible junction box wiring and power supply enclosure, access from below
- Integral thermal protection
- Easy maintenance access
- Optional dimming

MOUNTING

- Directly to junction box

LABELS

- Suitable for damp location

STEM Stem Kit

- Surface mount canopy
- Standard J-box surface mounting hardware
- Extruded aluminum stem 72" overall length
- Field cuttable





5 YEAR WARRANTY
Limited



ORDERING INFO

SERIES	WATTAGE	CRI / COLOR	BEAM	DRIVER	VOLT-AGE	FINISH	MOUNTING	OPTIONS
MSGRP-C MAGGIE SHORT CYLINDER Medium Single Gimbal	14C 14W LED 1200 lm nom.	8027 80CRI / 2700K 8030 80CRI / 3000K 8035 80CRI / 3500K	N Narrow 13° M Medium 22° W Wide 30° V Very Wide 50°	D1 Phase Dimming (120V only) D2 0-10V Dimming (120-277V only) D3 Lutron Hi-lume...* Forward Phase 2 wire 1% (120V only) D4 Lutron Hi-lume...* EcoSystem... & 3 wire (1%) (120-277V only) DE Lutron Hi-lume... EcoSystem...* 1% w/Soft-On, Fade-to-Black... (120-277V only)	1 120V U 120-277V	BB Black WW White Consult factory for custom colors.	<i>Leave blank for Surface Mount</i> STEM Stem Kit (extruded stem)	EM Emergency LED inverter
	20C 20W LED 1600 lm nom.	8040 80CRI / 4000K 9527 95CRI / 2700K 9530 95CRI / 3000K 9535 95CRI / 3500K 9540 95CRI / 4000K						
	28C 28W LED 2200 lm nom.							
MSGRP-C								

Ordering Example: **MSGRP-C-20C-9530-W-D3-1-BB-STEM-EM**

OPTICAL ACCESSORY	DESCRIPTION	LED SOURCE
		EF208-B
		<ul style="list-style-type: none"> • 14W LED • 21W LED • 28W LED • 35W LED
	Hex Cell Louver - Black	OPT-EF208B-HXL Ø2.00" (51mm) nom.
	Snoot with Cross Baffle White	OPT-EF208B-CBWW Ø2.56" (65mm) nom.
	Snoot with Cross Baffle Black	OPT-EF208B-CBBB Ø2.56" (65mm) nom.
	Diffused Lens	OPT-EF208B-P-DFL
	Linear Spread Lens	OPT-EF208B-P-LSL