
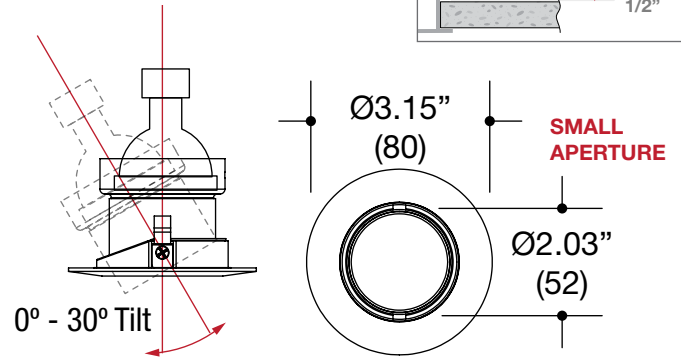
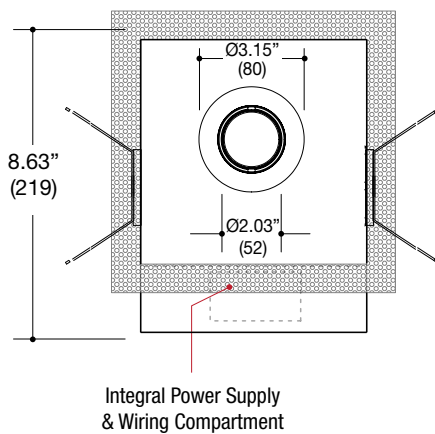
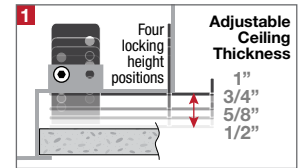


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

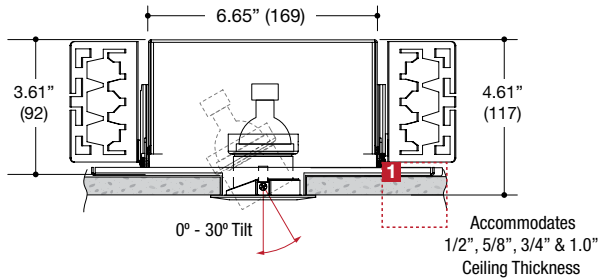

ROUND ADJUSTABLE DOWNLIGHT

- 3.15" recessed adjustable downlight
- Die-cast aluminum trim
- 0°-30° tilt aiming
- Flat black inner shield for reduced glare
- Powder coat finish

HOUSING

- All steel construction with powder coat finish
- Air-Tight rated
- **Ceiling Cut-Out - Ø3.00"**

LAMPS (not included)

- 12V MR16 50W max - Derate Labels Available
- LED Retrofit 15W max - Works with SORAA®
- Accepts up to 2 or more optical accessories dependent on lamp

ELECTRICAL

- Integral electronic or toroidal transformer
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable

MOUNTING

- Butterfly brackets for commercial installation in drywall, wood, stone, acoustic tile, or other ceiling types
- Perforated plate adjusts for 1/2", 5/8", 3/4" & 1.0" ceiling thickness
- Optional hanger bar attachment for residential installation

LABELS

- Suitable for damp location
- IC rated / Air-Tight / Title 24 Compliant

Patent Pending



ORDERING INFO

SERIES	WATTAGE / LAMP	POWER SUPPLY	VOLTAGE	FINISH	OPTIONS
6521-1AA-T	020MR16X MR16 20W 035MR16X MR16 35W 050MR16X MR16 50W	ET Electronic Transformer TT Q-Tran Toroidal Transformer	1 120V 2 277V 3 347V*	BB Black WW White	CP Chicago Plenum EM Emergency Relay IC Insulated Ceiling (MR16 15W or 20W)
MICRON Recessed Die-Cast Aluminum Trim Adjustable Pinhole Trimmed Fixture New Construction Housing	015MR16X MR16 15W LED Retrofit		* Consult factory		

Ordering Example: **6521-1AA-T-050MR16X-ET-1-WW-CP**