
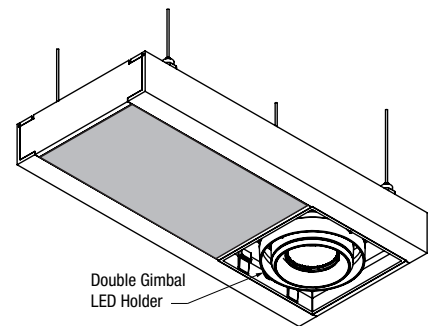
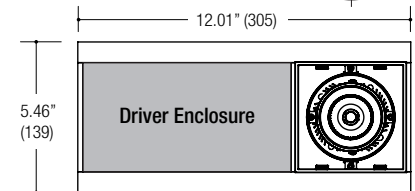
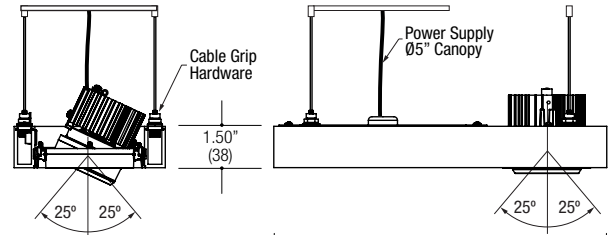






PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

CONFIG	A	B
11	12.01" (305)	5.46" (139)
12	16.15" (410)	5.46" (139)
13	27.97" (8710)	5.46" (139)
14	32.11" (816)	5.46" (139)
15	51.42" (1302)	5.46" (139)
16	55.38" (1407)	5.46" (139)
18	63.84" (1622)	5.46" (139)



Measurements in ( ) are metric equivalents.

#### CONSTRUCTION

- Horizontal surface-mount suspended ceiling fixture
- All aluminum construction with powder coat finish
- 1.50" x .75" extruded frame
- .188" thick aluminum cross blades
- Perforated driver enclosure for cooler operating temperature
- Frame mounted double gimbal LED source
- Lockable 25° x 25° tilt aiming
- Powder coat finish

#### LED Source

- Field-replaceable integral LED module
- Field-changeable optic
- CREE / ValuDIM™
- Accepts up to 2 or more optical accessories

#### ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access
- Optional dimming

#### MOUNTING

- Suspended ceiling mount
- 6" aircraft cable with cable grip hardware

#### LABELS

- Suitable for damp location








**5 YEAR WARRANTY**  
Limited



#### ORDERING INFO

SERIES	CONFIG	LED MODULE WATTAGE AND INFORMATION	CRI / COLOR	BEAM	DRIVER / VOLTAGE	FINISH	OPTIONS	
PNH-B  SMALL SUSPENDED MULTIFORMS  Horizontal Suspension Integral Drivers	11	CREE 08C 08W LED / 1094lm 13C 13W LED / 1473lm 19C 19W LED / 2117lm  Delivered @ 80CRI / 3000K Narrow Beam  ValuDIM™ 15V 15W LED / 876lm Delivered 3000-2000K Warm Dimming  Delivered @ 92CRI / 3000K Narrow Beam	8027	80CRI / 2700K	CREE N Narrow 16° M Medium 28° W Wide 42° V Very Wide 73°  ValuDIM™ N Narrow 17° M Medium 25° W Wide 38°	DMU Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V)	BB Black WW White SS Silver XX Custom	EM Remotely Mounted Emergency LED Inverter. (Intended for 1 light - Field wiring required)
	12		8030	80CRI / 3000K				
	13		8035	80CRI / 3500K				
	14		8040	80CRI / 4000K				
	15		9227	92CRI / 2700K				
	16		9230	92CRI / 3000K				
	16		9235	92CRI / 3500K				
	18		9240	92CRI / 4000K				
	18		9220	92CRI / 3000-2000K Warm Dimming ValuDIM Only				
	PNH-B							

Example: PNH-B-12-13C-8027-N-DMU-BB-EM

OPTICAL ACCESSORY	DESCRIPTION	LIGHT SOURCE
		SMALL
	Clear Lens	OPTB-CLR
	Clear Lens - LED Film	OPTB-L-CLR
	UV Lens	OPTB-UVL
	Hex Cell Louver	OPTB-HXL
	Diffusion Lens	OPTB-DFL
	Diffusion Lens - LED Film	OPTB-L-DFL
	Linear Spread Lens	OPTB-LSL
	Linear Spread Lens - LED Film	OPTB-L-LSL
	Prismatic Spread Lens	OPTB-PSL
	Snoot - Black	OPTB-SNB
	Snoot - White	OPTB-SNW
	Snoot - Silver	OPTB-SNS
	Snoot - White With Black Splay	OPTB-SNWB
	Snoot - Silver With Black Splay	OPTB-SNSB

\* Other filters, colored glass, dichroics & micro-lenses available upon request