


LED

INTEGRAL DRIVER

SMALL

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in () are metric equivalents.

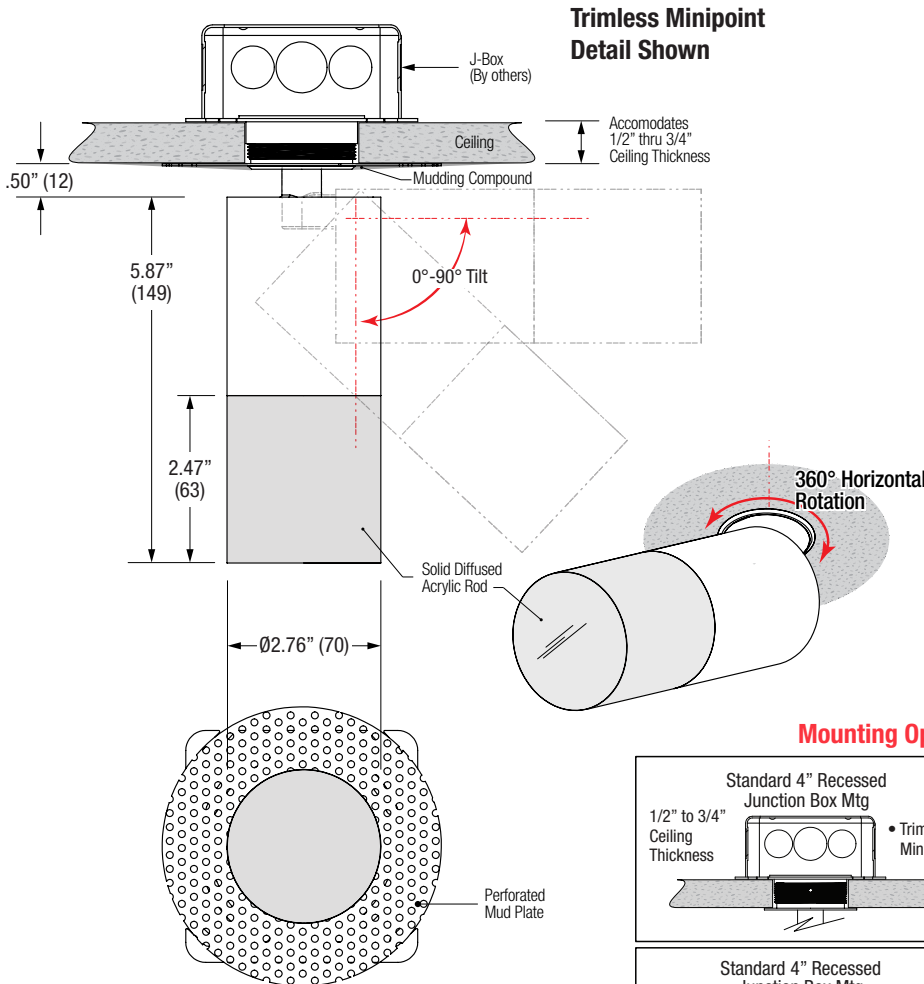

Specifications

MONOPOINT

- 2.76" diameter cylinder shape
- 0° - 90° vertical tilting / 360° horizontal rotation
- Constant friction
- Extruded aluminum housing
- Satin acrylic diffuser
- Powder coat finish

LED SOURCE

- CREE 08W / 600lm, (@ 95CRI min / 3000K)

ELECTRICAL

- Fully integral LED driver
- Phase dimmable power supply



MOUNTING

- Trimless "Minipoint" mounting for new construction recessed J-box
- "Minipoint" mounting for new construction recessed J-box
- Standard monopoint canopy for surface or recessed J-box

LABELS

- Suitable for damp location

Mounting Options



ORDERING INFO

SERIES	MOUNTING	WATTAGE	CRI / COLOR	DIFFUSER	POWER SUPPLY	VOLTAGE	FINISH
TRA21B	S Trimless Minipoint	08C 08W LED 600 lm nom. 400 lm del.	9530 95CRI / 3000K	X Acrylic Diffuser	D1 Phase Dimming	1 120V	BB Black WW White SS Silver
KATE Monopoint Die-Cast Aluminum Adjustable Aim Acrylic Diffuser	R Recessed Minipoint M Standard Monopoint						Consult factory for custom colors

Ordering Example: **TRA21B-M-08C-9530-X-D1-1-WW**

©2018 LF ILLUMINATION LLC

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS
9200 Deering Avenue
Chatsworth CA 91311

Telephone: 818-885-1335
Toll Free: 855-885-1335
Fax: 818-576-1335

www.lfillumination.com
rev:050718



**5 YEAR
WARRANTY**
Limited