
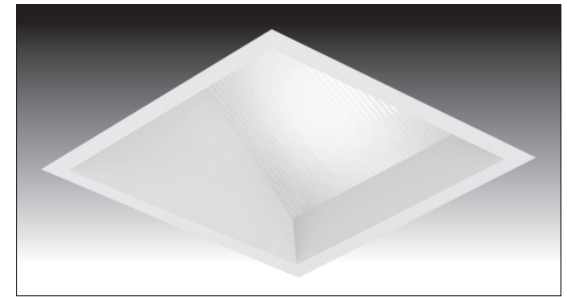


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in ( ) are metric equivalents.

**8632 SQUARE TRIMMED WALLWASH ACCENT** - The VF150 Series is family of products that meet and exceed the needs of today's lighting designers and specifiers that are seeking performance. Formed of die-cast aluminum.

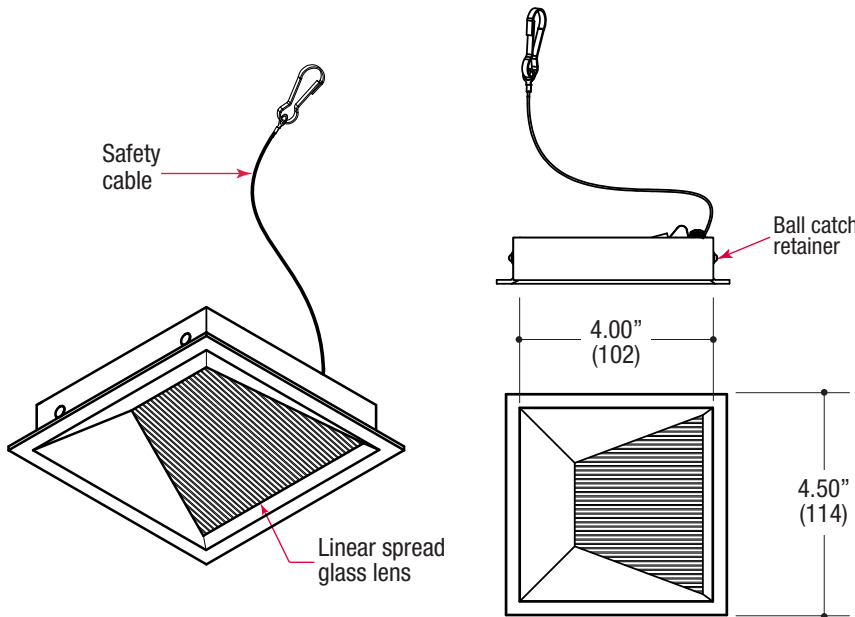

## Specifications


### SQUARE TRIMMED WALLWASH ACCENT

- Adjustable light output application
- 4.50" square die-cast aluminum trim
- .25" face trim
- Linear spread lens
- 1.75" regress for greater cut-off
- Ball catch retainer for easy trim insertion and removal
- Safety cable included
- Powder coat finish

### TRIM ORDERING INFO

TRIM SERIES	TRIM FINISH	OPTIONS
<b>8632</b>	<b>MW</b> White <b>MB</b> Black <b>XX</b> Custom	<b>SH</b> Shower rated
4.50" Square Wallwash Accent Die-Cast Aluminum Trimmed		
<b>8632</b>		

Example: **8632-MW-SH**

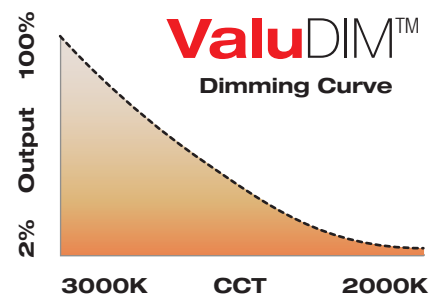


**ValuDIM™**

LF Illumination's new **ValuDIM™** warm dimming allows the features of warm dimming technology to be installed in fixtures and price points once thought impossible. The small footprint LED COB design uses many of our standard subassembly components and is compatible with virtually all standard dimming protocols currently available. The LED itself maintains 95CRI typ (92CRI min) across the usable CCT range of 3000K to 2000K and dims down to around 2% visible light output.



**5 YEAR WARRANTY**  
Limited

Measurements in ( ) are metric equivalents.

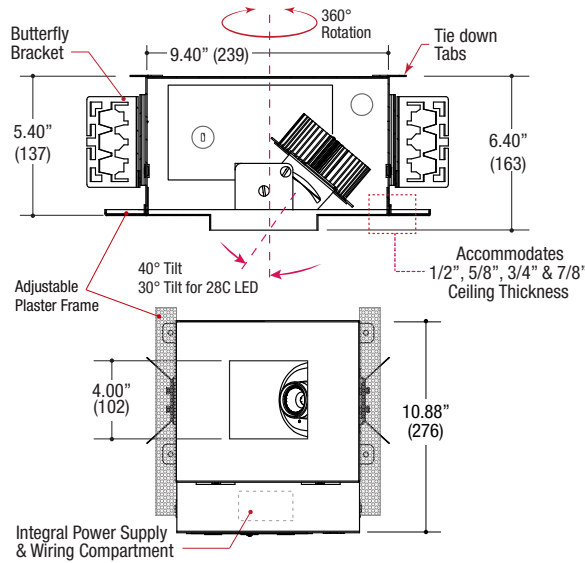

**(HVS-1BA-T)**  
**SMALL SIZED HOUSING**  
**(AD) Adjustable Downlight**

## Specifications

### SQUARE TRIMMED HOUSING

- Housing of all steel construction
- Adjustable plaster frame
- Black powder coat finish
- **Ceiling Cut-out - 4.25" x 4.25"**

### ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Internal thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable

### MOUNTING

- Butterfly brackets for commercial installation in drywall and other mud in ceiling types
- Perforated plate adjusts for 1/2", 5/8", 3/4" & 7/8" ceiling thickness
- Includes heavy-duty **L-Bars™** hanger bar system for residential installation

### LABELS

- Suitable for damp location, except when ordered with shower trim - Suitable for wet location
- **Air-Tight / IC Optional**



### HOUSING ORDERING INFO

SERIES	LED MODULE WATTAGE AND INFORMATION	CRI / COLOR	BEAM	HOUSING TYPE	DRIVER	VOLTAGE	OPTIONS
<b>HVS-1BA-T</b> Small Square Trimmed New Construction Housing	<b>BRIDGELUX</b> 11L 11W LED / 825lm nom. 16L 16W LED / 1100lm nom.	8027 80CRI / 2700K Bridgelux / CREE 8030 80CRI / 3000K Bridgelux / CREE 8035 80CRI / 3500K Bridgelux / CREE 8040 80CRI / 4000K Bridgelux / CREE 9027 90CRI / 2700K Bridgelux Only 9030 90CRI / 3000K Bridgelux Only 9727 97CRI / 2700K Bridgelux Only	<b>BRIDGELUX</b> W Wide	<b>AD</b> Adjustable	<b>D1</b> Phase Dimming (120V only) <b>D2</b> 0-10V Dimming (120-277V only) <b>D3</b> Lutron Hi-Lume™ Forward Phase (120V only) <b>D4</b> Lutron Hi-Lume™ EcoSystem™ & 3 wire 1% (120-277V only) <b>DE</b> Lutron Hi-Lume™ EcoSystem™ 1% with Soft-On, Fade-to-Black™ 1% (120-277V only)	1 120V 2 277V U 120-277V*	<b>IC</b> Insulated Ceiling (Not Available in 28C) <b>EM</b> Remotely Mounted Emergency LED Inverter
	Black finish is standard	<b>CREE</b> 09C 09W LED / 900lm nom. 14C 14W LED / 1200lm nom. 20C 20W LED / 1600lm nom.* 28C 28W LED / 2200lm nom.* *HVS-1BA-T Small housing only	9730 97CRI / 3000K Bridgelux Only 9527 95CRI / 2700K CREE Only 9530 95CRI / 3000K CREE Only 9535 95CRI / 3500K CREE Only 9540 95CRI / 4000K CREE Only				
	<b>ValuDIM™</b> 15V 15W LED / 810lm nom. 3000-2000K Warm Dimming	9220 92CRI / 3000-2000K Warm Dimming ValuDIM Only	<b>ValuDIM™</b> W Wide				
<b>HVS-1BA-T</b>							

Example: **HVS-1BA-T-14C-8027-W-AD-D2-U-IC**