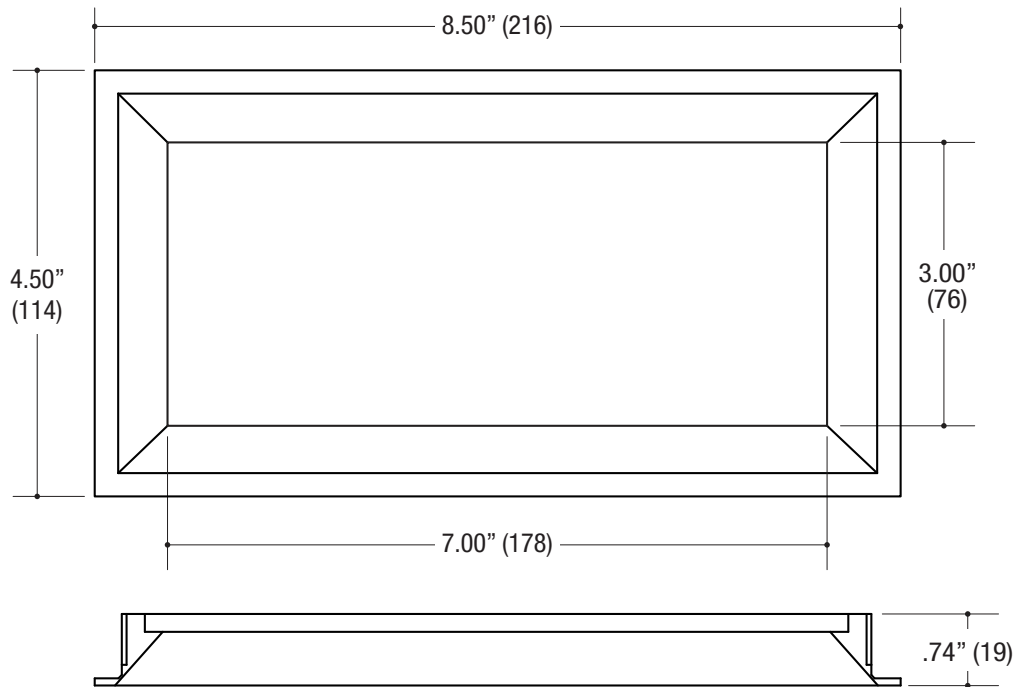


PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in () are metric equivalents.


8704 **RECTANGULAR BEVELED TRIMMED ACCENT** - The VF150 Series is a family of products that meet and exceed the needs of today's lighting designers and specifiers that are seeking performance. Formed of die-cast aluminum.



ORDERING INFO

TRIM SERIES	TRIM FINISH	OPTIONS
8704 4.50" X 8.50" RECTANGULAR Large Aperture Die-Cast Beveled Accent Trimmed	MB Black MW White XX Custom	CL Clear lay-in lens DL Diffusion lay-in lens SHCL Shower rated Clear lay-in lens SHDL Shower rated Diffusion lay-in lens

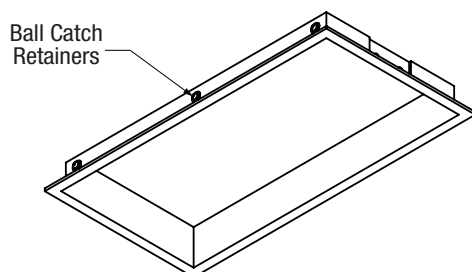Example: **8704-MW-CL**



Specifications

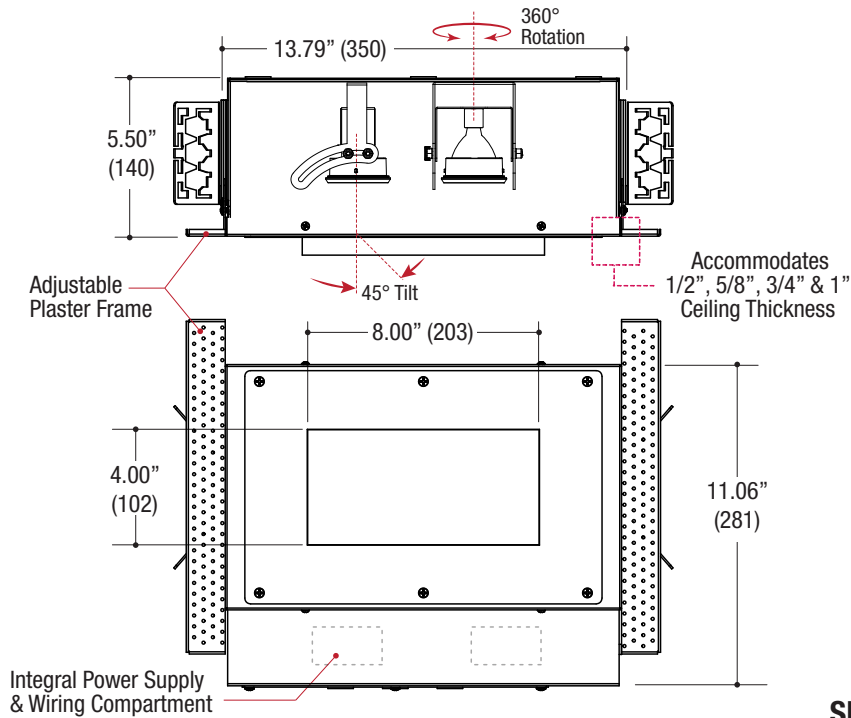
RECTANGULAR TRIMMED DOWNLIGHT

- Adjustable light output application
- 4.50" x 8.50" beveled die-cast aluminum Accent
- Large 3.00" x 7.00" rectangular aperture
- .25" face trim
- Accepts up to 2 or more optical accessories
- Ball catch retainer for easy trim insertion and removal with safety cable included
- Powder coat finish

LAMP SOURCE *(lamp not included)*

- 12V MR16 20W max - Derate Labels Available
- CMHMR16 in 20W
- LED Retrofit 15W max - Works with SORAA®

Measurements in () are metric equivalents.



(HVS-2BA-T)
SMALL SIZED HOUSING
(AD) Adjustable Downlight
(FD) Fixed Downlight (Also available)

Specifications

RECTANGULAR TRIMMED HOUSING

- Housing of all steel construction
- Adjustable plaster frame
- Black powder coat finish
- **Ceiling Cut-out - 4.13" x 8.13"**

ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Internal thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable

MOUNTING

- Butterfly brackets for commercial installation in drywall, wood, stone, acoustic tile, or other ceiling types
- Perforated plate adjusts for 1/2", 5/8", 3/4" & 1" ceiling thickness
- Includes Heavy-Duty **L-Bars™** hanger bar system for residential installation

LABELS







- Suitable for damp location, except when ordered with shower trim - Suitable for wet location
- **Air-Tight / IC Optional**



HOUSING ORDERING INFO

SERIES	WATTAGE / LAMP	HOUSING TYPE	POWER SUPPLY	VOLTAGE	OPTIONS
HVS-2BA-T	020MR16X MR16 20W	FD Fixed AD Adjustable	ET Electronic Transformer MT Magnetic Transformer TT Q-Tran Toroidal Transformer	1 120V 2 277V	IC Insulated Ceiling 20W max. MR16 only
VF150 SERIES Rectangular Trimmed New Construction Housing Black finish standard	015MR16X MR16 15W LED Retrofit				
	020CM16X 20W CMHMR16		EB Electronic Metal Halide Ballast		

Ordering Example: **HVS-2BA-T-020MR16X-FD-ET-1-IC**

OPTICAL ACCESSORY	DESCRIPTION	LIGHT SOURCE
		SMALL
	Clear Lens	OPTB-CLR Ø2.00" (51mm) nom.
	Clear Lens - LED Film	OPTB-L-CLR Ø2.00" (51mm) nom.
	UV Lens	OPTB-UVL Ø2.00" (51mm) nom.
	Hex Cell Louver	OPTB-HXL Ø2.00" (51mm) nom.
	Diffusion Lens	OPTB-DFL Ø2.00" (51mm) nom.
	Diffusion Lens - LED Film	OPTB-L-DFL Ø2.00" (51mm) nom.
	Linear Spread Lens	OPTB-LSL Ø2.00" (51mm) nom.
	Linear Spread Lens - LED Film	OPTB-L-LSL Ø2.00" (51mm) nom.
	Prismatic Spread Lens	OPTB-PSL Ø2.00" (51mm) nom.

* Other filters, colored glass, dichroics & micro-lenses available upon request