



**LED**

**INTEGRAL DRIVER**

**SMALL**

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

Measurements in ( ) are metric equivalents.

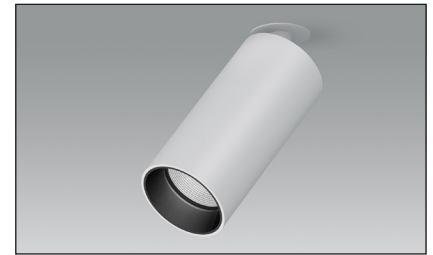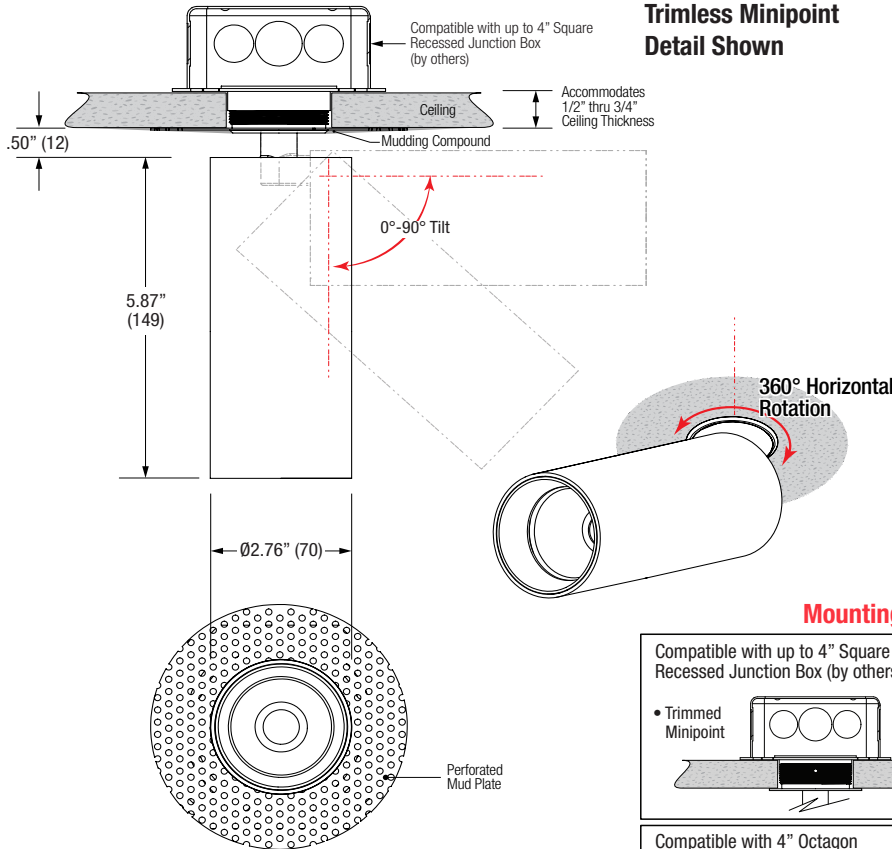

### Specifications

#### MONOPOINT

- 2.76" diameter cylinder shape
- 0° - 90° vertical tilting / 360° horizontal rotation
- Constant friction
- Die cast aluminum housing
- LED optical grade reflector
- Powder coat finish

#### LED SOURCE

- CREE
- ValuDIM™ Warm dimming
- Field replaceable optics available
- Will accept 1 lens and 1 louver

#### ELECTRICAL

- Fully integral LED driver
- Phase dimmable or 0-10V power supply

#### MOUNTING

- Trimless "Minipoint" mounting for new construction recessed J-box
- "Minipoint" mounting for new construction recessed J-box
- Standard monopoint canopy for surface or recessed J-box

#### LABELS

- Suitable for damp location



**5 YEAR WARRANTY**

Limited

### ORDERING INFO

SERIES	MOUNTING	WATTAGE	CRI / COLOR	BEAM	POWER SUPPLY	FINISH
<b>TRA19B</b> <b>JULIE Monopoint</b> Die-Cast Aluminum Adjustable Aim	<b>S</b> Trimless Minipoint	<b>08C</b> 8W LED 801 lm del.	<b>8027</b> 80CRI / 2700K <b>8030</b> 80CRI / 3000K <b>8035</b> 80CRI / 3500K <b>8040</b> 80CRI / 4000K <b>9227</b> 92CRI / 2700K <b>9230</b> 92CRI / 3000K <b>9235</b> 92CRI / 3500K <b>9240</b> 92CRI / 4000K <b>9827</b> 98CRI / 2700K <b>9830</b> 98CRI / 3000K <b>9835</b> 98CRI / 3500K <b>9840</b> 98CRI / 4000K	<b>N</b> Narrow 12° <b>M</b> Medium 25° <b>W</b> Wide 34° <b>V</b> Very Wide 55°	<b>DMU</b> Dimming Multiple Forward/Reverse Phase (@ 120V only) 0-10V Wires Present (@ 120-277V)	<b>BB</b> All Black <b>WB</b> White with Black Bezel <b>WW</b> All White <b>SB</b> Silver with Black Bezel  Consult factory for custom colors
	<b>R</b> Recessed Minipoint	<b>13C</b> 13W LED 1078 lm del.				
	<b>M</b> Standard Monopoint	<b>15C</b> 15W LED 1208 lm del.  Delivered @ 80CRI / 3000K Narrow Beam				
	<b>ValuDIM™</b> <b>15V</b> 15W LED / 712lm del. / 3000-1800K Warm Dimming Delivered @ 92CRI / 3000K Narrow Beam	<b>9220</b> 92CRI / 3000-1800K Warm Dimming (ValuDIM Only)				

Ordering Example: **TRA19B-M-13C-9830-M-DMU-WW**

©2022 LF ILLUMINATION LLC

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS  
9200 Deering Avenue  
Chatsworth CA 91311

Telephone: 818-885-1335  
Toll Free: 855-885-1335  
Fax: 818-576-1335

[www.lfillumination.com](http://www.lfillumination.com)  
rev. 051022