

RECESSED ADJUSTABLE WALL WASH / DOWNLIGHT

TRIMMED


LED


LARGE

ILLUMINATION


PROJECT

CATALOG NUMBER

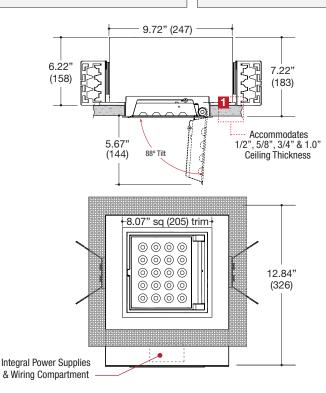



Designed by Franco Mirenzi



WALL WASH / DOWNLIGHT

- Recessed adjustable downlight
- Die-cast aluminum construction
- Safety glass lens included
- 0°-88° lockable tilt aiming
- Powder coat finish

HOUSING

- All steel construction
- Powder coat finish
- Ceiling Cut-Out 7.65" x 7.65"

LED SOURCE

ORDERING INFO

- Twenty (20) LED Array
- 46 watts total, 3365 lumens, 80CRI / 3000K
- Available in 3000K or 4000K color temperatures
- Narrow (10°), Medium (23°) or Wide (46°) distribution

ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable

MOUNTING

- Butterfly brackets for commercial installation in drywall, wood, stone, acoustic tile, or other ceiling types
- Perforated plate adjusts for 1/2", 5/8", 3/4" & 1.0" ceiling thickness
- Optional hanger bar attachment for residential installation

LABELS

• Suitable for damp location

Patent Pending





SERIES	WATTAGE	CRI / COLOR	BEAM	DRIVER	VOLTAGE	FINISH	OPTIONS
7722-1DN-T PIAZZA Recessed Large Die-Cast Aluminum Trim Adjustable Wall Wash / DL Trimmed Fixture New Construction Housing	46L 46W LEE 3365 Im nom.	8030 80CRI / 3000K 8040 80CRI / 4000K		LD LED Driver D1 Phase Dim. 120V Driver D2 0-10V Dim. Driver D3 Lutron Hi-Lume Forward Phase 2-Wire (1%) D4 Lutron Hi-Lume Eco-System & 3-Wire (1%) D5 Lutron Eco-System 5-Series 4-Wire (5%) (Consult factory for further dimming options)	1 120V U 120-277V	ww White	CP Chicago Plenum EM Emergency Relay

Ordering Example: 7722-1DN-T-46L-8030-N-D1-1-WW-CP

©2016 LF ILLUMINATION LLC

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS 9200 Deering Avenue Chatsworth CA 91311 Telephone: 818-885-1335 Toll Free: 855-885-1335 Fax: 818-576-1335

www.lfillumination.com rev: 022216