
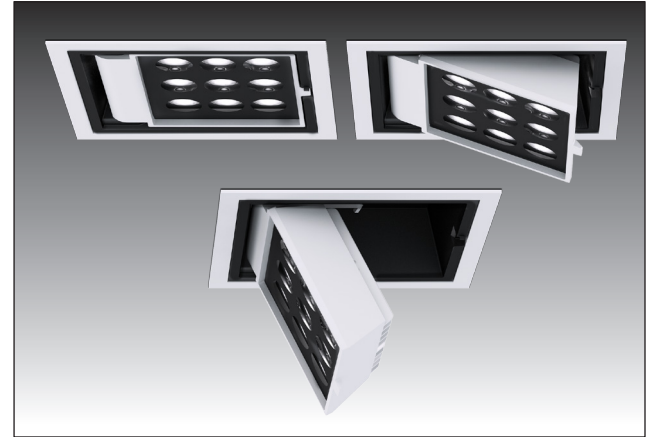


TRIMMED


LED

MINI

PROJECT	TYPE	CATALOG NUMBER
---------	------	----------------

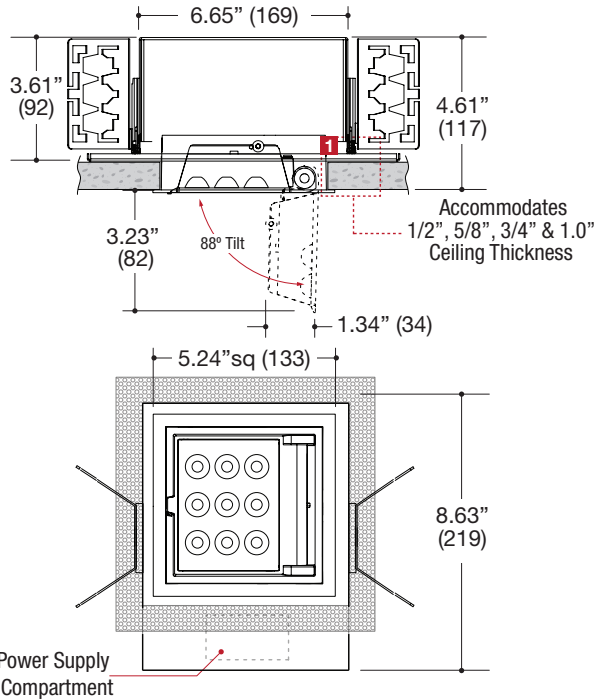

Designed by Franco Mireni

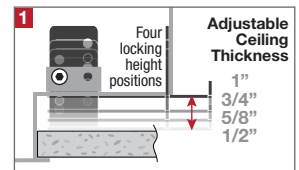

WALL WASH / DOWNLIGHT

- Recessed adjustable downlight
- Die-cast aluminum construction
- Safety glass lens included
- 0°-88° lockable tilt aiming
- Powder coat finish

HOUSING

- All steel construction with powder coat finish
- Air-Tight rated
- **Ceiling Cut-Out - 5.00" x 5.00"**

LED SOURCE

- Nine (9) LED Array
- 21 watts total, 1520 lumens, 80CRI / 3000K
- Available in 3000K or 4000K color temperatures
- Narrow (10°), Medium (23°) or Wide (46°) distribution

ELECTRICAL

- Field-replaceable integral LED driver
- Electrical wiring compartment integrated into housing construction
- Thermal protection
- Easy maintenance access through ceiling opening
- Rated for through-branch wiring
- Dimmable

MOUNTING

- Butterfly brackets for commercial installation in drywall, wood, stone, acoustic tile, or other ceiling types
- Perforated plate adjusts for 1/2", 5/8", 3/4" & 1.0" ceiling thickness
- Optional hanger bar attachment for residential installation

LABELS

- Suitable for damp location
- IC rated / Air-Tight

Patent Pending

5 YEAR WARRANTY
Limited



ORDERING INFO

SERIES	WATTAGE	CRI / COLOR	BEAM	DRIVER	VOLTAGE	FINISH	OPTIONS
7622-1AA-T	21L 21W LED 1520 lm nom.	8030 80CRI / 3000K 8040 80CRI / 4000K	N Narrow 10° M Medium 23° W Wide 46°	LD LED Driver D1 Phase Dim. 120V Driver (120V only) D2 0-10V Dim. Driver	1 120V U 120-277V	WW White	CP Chicago Plenum EM Emergency Relay IC Insulated Ceiling
PIAZZA Recessed Mini Die-Cast Aluminum Trim Adjustable Wall Wash / DL Trimmed Fixture New Construction Housing							

Ordering Example: **7622-1AA-T-21L-8030-N-D1-1-WW-CP**

©2016 LF ILLUMINATION LLC

We reserve the right to change or withdraw specifications without prior notice.

HEADQUARTERS
9200 Deering Avenue
Chatsworth CA 91311

Telephone: 818-885-1335
Toll Free: 855-885-1335
Fax: 818-576-1335

www.lfillumination.com
rev: 022216